


- NOTE:
1. CABLE: 28AWG X 25C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
 2. CONNECTOR: P1: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS; P2: CENTRONICS 36PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
 3. THUMB SCREW TO BE MOLDED.
 4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

P1	P2	P1	P2	P1	P2
1	1	10	10	19	19
2	2	11	11	20	21
3	3	12	12	21	23
4	4	13	13	22	25
5	5	14	14	23	27
6	6	15	32	24	29
7	7	16	31	25	30
8	8	17	36		
9	9	18	33		

SHELL — SHELL(DRAIN WIRE)

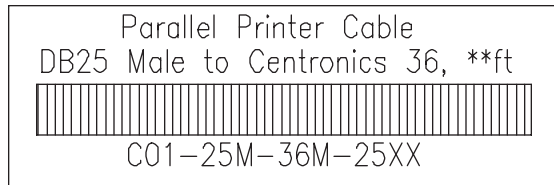

"**" & "XX" SEE CHART 1

CHART 1:

P/N	**	xx	L	T
C01-25M-36M-2503	3	03	914	±25
C01-25M-36M-2506	6	06	1829	±51
C01-25M-36M-2510	10	10	3048	±51
C01-25M-36M-2515	15	15	4572	+152/-51
C01-25M-36M-2524	24	24	7315	+152/-51



0
 S

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.			
	mm	TITLE DB25M / CN36M	
SCALE		CUS. NAME	
SHEET	1/1	CUS. P/N	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		C01-25M-36M-25**	
X± 0.2	.XX±	DRAW NO.	
XXX±	ANGLES±	P9907040-E	
REV. A	CUS.REV A	APPROVED _____	DATE _____



ENG. _____ DATE _____
CHECKED _____ DATE _____
APPROVED _____ DATE _____