


NOTE:

- 1. CABLE: 28AWG X 25C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
- 2. CONNECTOR: P1 & P2: D-SUB 25PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- 3. THUMB SCREW TO BE MOLDED.
- 4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
- 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 6. PACKING: 1. 4PCS METRIC(M2.6) SCREW IN A CLEAR POLYBAG, SEALED, LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON POLYBAG.
2. EACH CABLE & PACKAGED SCREW IN A TNT PRINTED ZIP-LOCK POLY-BAG.
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

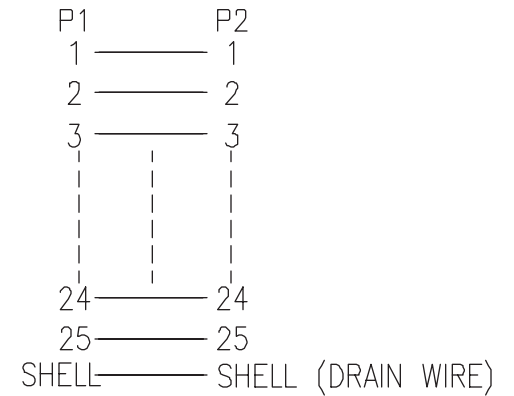

METRIC SCREWS

DETAIL A

RS-232 Cable
DB25 Female to DB25 Female, **ft

C03-25F-25F-25XX

CHART 1: "**" & "XX" SEE CHART 1

P/N	**	XX	L	T
C03-25F-25F-2506	6	06	1829	±51
C03-25F-25F-2510	10	10	3048	±51
C03-25F-25F-2515	15	15	4572	+152/-51

DRAWING APPROVED _____ DATE: _____	
SAMPLE APPROVED PER _____ DATE: _____ DRAWING SPECIFICATIONS	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.	
 SCALE SHEET 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED X± 0.2 .XX± .XXX± ANGLES± REV. ∅ CUS.REV A	TITLE DB25F / DB25F CUS. NAME CUS. P/N C03-25F-25F-25** DRAW NO. P9907021-E
ENG. _____	DATE _____
CHECKED _____	DATE _____
APPROVED _____	DATE _____

