
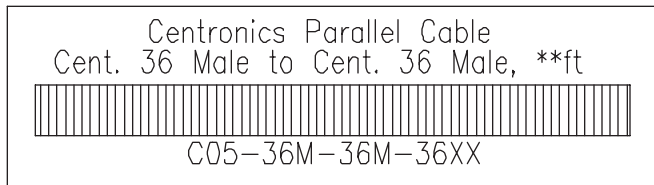


NOTE:

1. CABLE: 28AWG X 36C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
2. CONNECTOR: P1 & P2: CENTRONICS 36PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
4. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
5. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.

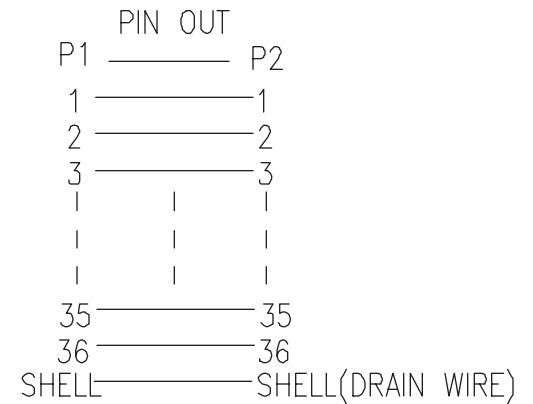

"**" & "XX" SEE CHART 1

CHART 1:

P/N	**	XX	L	T
C05-36M-36M-3606	6	06	1829	±51
C05-36M-36M-3610	10	10	3048	±51
C05-36M-36M-3612	12	12	3658	+152/-51
C05-36M-36M-3615	15	15	4572	+152/-51
C05-36M-36M-3624	24	24	7315	+152/-51
C05-36M-36M-3625	25	25	7620	+152/-51
C05-36M-36M-3650	50	50	15240	+305/-152



DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.			
⊕	mm	TITLE CN36M / CN36M	
SCALE	1/1	CUS. NAME	
SHEET	1/1	CUS. P/N C05-36M-36M-36**	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		DRAW NO. P9907039-E	
X± 0.2	.XX±		
.XXX±	ANGLES±		
REV. ø	CUS.REV	ENG. _____	DATE _____
<input type="checkbox"/> 0	<input type="checkbox"/> S	CHECKED _____	DATE _____
		APPROVED _____	DATE _____