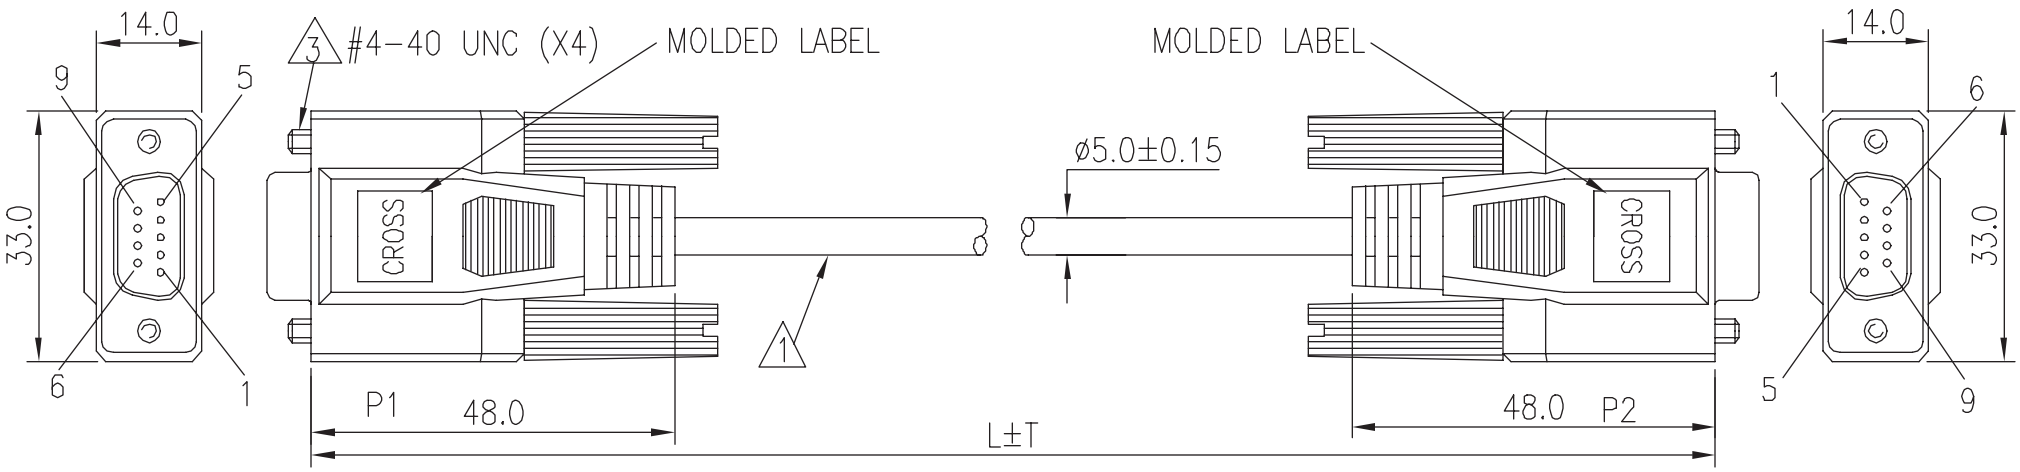

NOTE:

1. CABLE: 28AWG X 7C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
2. CONNECTOR: P1 & P2: D-SUB 9PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. THUMB SCREW TO BE MOLDED.
4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, BAR CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

P1	P2
1	7
	8
2	3
3	2
4	6
5	5
6	4
7	1
8	
SHELL	SHELL(DRAIN WIRE)

NULL MODEM CABLE
DB9 FEMALE TO DB9 FEMALE, **FT
C06-09F-09F-CROSS-XX

RoHS COMPLIANT

C06-09F-09F-CROSS-910	10	10	3048	±51
C06-09F-09F-CROSS-906	6	06	1829	±51
P/N	**	XX	L	T

☐ O
☐ S

DRAWING APPROVED _____ DATE: _____

SAMPLE APPROVED PER DRAWING SPECIFICATIONS _____ DATE:

PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.

mm		TITLE	DB9F TO DB9F
SCALE	NONE		
SHEET	1/1	CUS. NAME	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED			
.X ± 0.2	.XX ±	CUS. P/N	C06-09F-09F-CROSS-XX
.XXX ±	ANGLES ±		
REV. A	CUS. REV	PART NO.	P9912046-E

TNT

ENG.	DATE
CHECKED	DATE
APPROVED	DATE