


NOTE:

- ①. CABLE: 28AWG X 9C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
- 2. CONNECTOR: P1 & P2: D-SUB 9PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- ③. THUMB SCREW TO BE MOLDED.
- 4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
- 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

SHELL ——— SHELL(DRAIN WIRE)

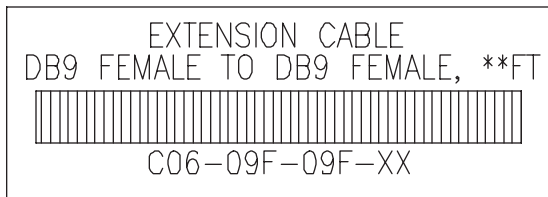

"XX" & "**" SEE CHART 1



CHART 1:

C06-09F-09F-915	15	15	4572	+152/-51	<input type="checkbox"/> O
C06-09F-09F-910	10	10	3048	±51	<input type="checkbox"/> O
C06-09F-09F-906	6	06	1829	±51	<input type="checkbox"/> S
P/N	**	XX	L	T	

DRAWING APPROVED _____ DATE: _____		TITLE DB9F TO DB9F	
SAMPLE APPROVED PER DRAWING SPECIFICATIONS _____ DATE: _____		CUS. NAME	
PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.			
ϕ \ominus	mm	CUS. P/N C06-09F-09F-XX	
SCALE	NONE	PART NO. P9912047-E	
SHEET	1/1	ENG. _____ DATE _____	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		CHECKED _____ DATE _____	
.X ±0.2	.XX ±	APPROVED _____ DATE _____	
.XXX ±	ANGLES ±		
REV. C	CUS. REV		

