


NOTE:

- 1. CABLE: 28AWG X 6C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
- 2. CONNECTOR: P1 & P2: MINI DIN 6PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- 3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
- 4. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 5. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

P1	P2
1 ———	1
2 ———	2
3 ———	3
4 ———	4
5 ———	5
6 ———	6
SHELL ———	SHELL(DRAIN WIRE)

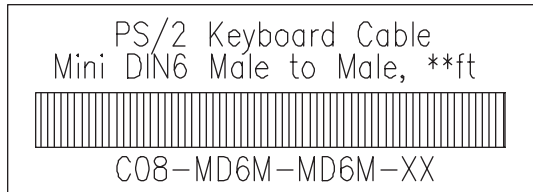

"\*\*" & "XX" SEE CHART 1

CHART 1:

P/N	**	XX	L	T
C08-MD6M-MD6M-06	6	06	1829	±51
C08-MD6M-MD6M-10	10	10	3048	±51
C08-MD6M-MD6M-15	15	15	4572	+152/-51
C08-MD6M-MD6M-25	25	25	7620	+152/-51
C08-MD6M-MD6M-50	50	50	15240	+305/-152
C08-MD6M-MD6M-75	75	75	22860	+305/-152
C08-MD6M-MD6M-100	100	100	30480	+305/-152



0  
 S

DRAWING APPROVED _____ DATE: _____		SAMPLE APPROVED PER _____ DATE: _____	
PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.			
$\phi$ $\square$	mm	TITLE	
SCALE	NONE	CUS. NAME	
SHEET	1/1	CUS. P/N	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		CUS. P/N	ENG. _____ DATE _____
.X ± 0.2	.XX ±	CUS. P/N	CHECKED _____ DATE _____
.XXX ±	ANGLES ±	PART NO.	APPROVED _____ DATE _____
REV. $\phi$	CUS. REV. A	P9907034-E	