


NOTE:

1. CABLE: 28AWG X 7C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE(TNT-BG-03) PVC JACKET. OD:5.0±0.15mm.
2. CONNECTOR: P1&P2: D-SUB 9PIN FEMALE, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION. BLACK PBT.
3. THUMB SCREW TO BE MOLDED.
4. ALL HOOD: MOLDED BEIGE(TNT-BG-03) PVC.
5. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
6. PACKING: EACH CABLE IN A TNT PRINTED POLY-BAG.

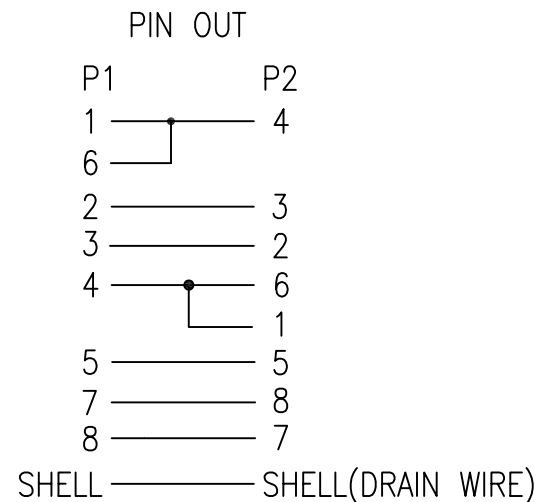

Null Modem Cable
DB9 Female to DB9 Female, XXft
C09-09F-09F-**

<DATE> MADE IN CHINA

CHART 1:

P/N	xx	**	L	T
C09-09F-09F-06	6	06	1829	±51
C09-09F-09F-10	10	10	3048	±51
C09-09F-09F-15	15	15	4572	+152/-51
C09-09F-09F-25	25	25	7620	+152/-51



TOLERANCE			Tri-Net Technology http://www.trinetusa.com	
INCHES	M/M			
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
SCALE	NONE			REV A
UNIT	MM			
DRAWN BY	Jeamous		SHEET	1/1
CHECK BY			DATE	04/22/05
APPD BY			TITLE	DB9F TO DB9F
			PART NO.	C09-09F-09F-XX