

NOTE:

1. CABLE: 28AWG X 7C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE(TNT-BG-02) PVC JACKET. OD:5.0±0.15mm.
2. CONNECTOR: P1: D-SUB 9PIN MALE, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
3. CONNECTOR: P2: D-SUB 9PIN FEMALE, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
4. THUMB SCREW TO BE MOLDED.
5. ALL HOOD: MOLDED BEIGE(TNT-BG-02) PVC.
6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
7. PACKING: EACH CABLE IN A TNT PRINTED POLY-BAG.

PIN OUT


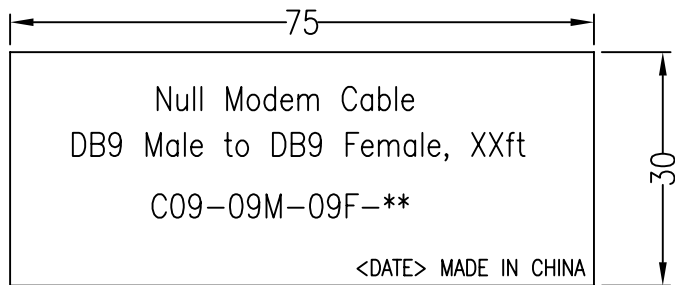


CHART 1:

P/N	XX	**	L	T
C09-09M-09F-06	6	06	1829	±51
C09-09M-09F-10	10	10	3048	±51
C09-09M-09F-15	15	15	4572	+152/-51
C09-09M-09F-25	25	25	7620	+152/-51

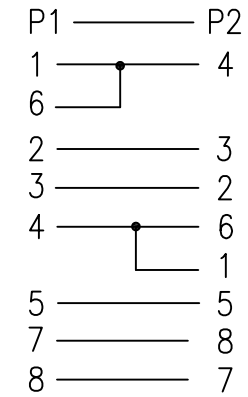

TOLERANCE		TNT Tri-Net Technology	
INCHES	M/M	http://www.trinetusa.com	
.X	.015	SCALE	NONE
.XX	.010	UNIT	MM
.XXX	.005	SHEET	1/1
DRAWN BY Jeamous		DATE	04/22/05
CHECK BY		TITLE DB9M TO DB9F	
APPD BY		PART NO. C09-09M-09F-XX	