


- NOTE:
1. CABLE: 28AWG X 8C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
 2. CONNECTOR: P1: D-SUB 9PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS; P2: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
 3. THUMB SCREW TO BE MOLDED.
 4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
 6. PACKING: 1. 2PCS METRIC(M2.6) SCREW IN A CLEAR POLYBAG, SEALED, LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON POLYBAG. 2. EACH CABLE & PACKAGED SCREW IN A TNT PRINTED ZIP-LOCK POLY-BAG. BAR CODE LABEL (GREEN BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

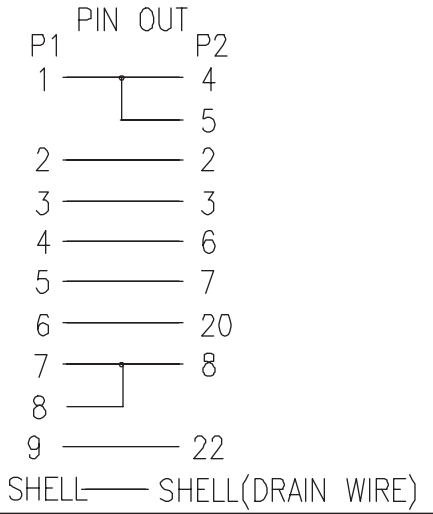

DETAIL A
METRIC SCREWS

Null Modem Cable
DB25 Male to DB9 Female, **ft

C09-25M-09F-XX

"**" & "XX" SEE CHART 1

CHART 1:

P/N	**	XX	L	T
C09-25M-09F-906	6	06	1829	±51
C09-25M-09F-910	10	10	3048	±51
C09-25M-09F-915	15	15	4572	+152/-51
C09-25M-09F-925	25	25	7620	+152/-51

O
 S

DRAWING APPROVED _____ DATE: _____	
SAMPLE APPROVED PER _____ DATE: _____ DRAWING SPECIFICATIONS	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.	
	mm
SCALE	
SHEET	1/1
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED	
X±	.XX±
XXX±	ANGLES±
REV. A	CUS.REV A
TITLE DB9F / DB25M	
CUS. NAME	
CUS. P/N C09-25M-09F-XX	
DRAW NO. P9907023-E	
	ENG. _____ DATE _____
	CHECKED _____ DATE _____
	APPROVED _____ DATE _____

