


- NOTE:
1. CABLE: 28AWG X 8C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
  2. CONNECTOR: P1 & P2: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS;
  3. THUMB SCREW TO BE MOLDED.
  4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
  5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
  6. PACKING: 1. 4PCS METRIC(M2.6) SCREW IN A CLEAR POLYBAG, SEALED, LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON POLYBAG.  
2. EACH CABLE & PACKAGED SCREW IN A TNT PRINTED ZIP-LOCK POLY-BAG.  
BAR CODE LABEL (GREEN BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

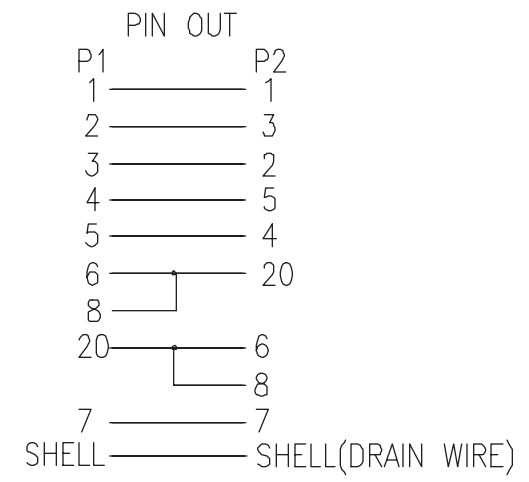

DETAIL A  
METRIC SCREWS

Null Modem Cable  
DB25 Male to DB25 Male, \*\*ft

C09-25M-25M-XX

"\*\*" & "XX" SEE CHART 1

CHART 1:

P/N	**	XX	L	T
C09-25M-25M-06	6	06	1829	$\pm 51$
C09-25M-25M-10	10	10	3048	$\pm 51$
C09-25M-25M-15	15	15	4572	+152/-51



DRAWING APPROVED _____ DATE: _____	
SAMPLE APPROVED PER _____ DATE: _____ DRAWING SPECIFICATIONS	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.	
	<b>TITLE</b> DB25M / DB25M <b>CUS. NAME</b> <b>CUS. P/N</b> C09-25M-25M-** <b>DRAW NO.</b> P9907020-E
<b>SCALE</b> $\swarrow$ <b>SHEET</b> 1/1 <b>DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED</b> X± 0.2 .XX± .XXX± ANGLES± <b>REV.</b> $\phi$ <b>CUS.REV</b> A	<b>ENG.</b> _____ <b>DATE</b> _____ <b>CHECKED</b> _____ <b>DATE</b> _____ <b>APPROVED</b> _____ <b>DATE</b> _____