


NOTE:

1. CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED 75~UL1354) + 28AWG*8C, AL-FOIL AND BRAID(85% min) SHIELDED WITH DRAIN WIRE, UL2919, BLACK CMP RATED PVC JACKET, $\phi 8.0 \pm 0.15\text{mm}$.
2. CONNECTOR: CONNECTOR:
P1,P2: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE,EMPTY 9PIN GOLD FLASH CONTACTS AND SHELL,PBT BLACK.
3. THUMB SCREW TO BE MOLDED 25P PVC.
4. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
5. ALL HOOD: MOLDED BLACK PVC 25P.
6. MOLD NO:HD15-01/N01.

APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

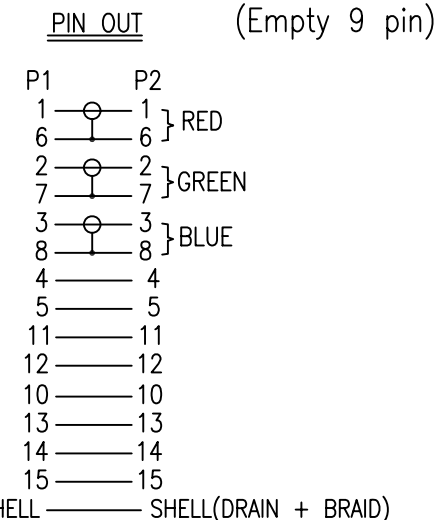

PART NO CHART:

P/N	XX(FT)	L(MM)	T(MM)
C18P-HD15MM-03	03	915	+15/-15
C18P-HD15MM-06	06	1829	+51/-51
C18P-HD15MM-10	10	3048	+51/-51
C18P-HD15MM-15	15	4572	+152/-51
C18P-HD15MM-25	25	7620	+152/-51
C18P-HD15MM-35	35	10675	+185/-51
C18P-HD15MM-50	50	15240	+305/-152
C18P-HD15MM-75	75	22860	+305/-152
C18P-HD15MM-100	100	30480	+305/-152



A	INITIAL RELEASE		03/16/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			Tri-Net Technology, Inc. http://www.trinetusa.com	
INCHES				
.X	.015	.30		
.XX	.010	.10		
M/M			SCALE	NONE
.XXX	.005	.05	UNIT	MM
DRAWN BY	Lucy		SHEET	1/1
			DATE	03/16/07
CHECK BY	TITLE HD15M TO HD15M			
APPD BY	PART NO. C18P-HD15MM-XX			