


P/N	xx	L	T
C27-RM-RM-06	06	1829mm	±51mm
C27-RM-RM-10	10	3048mm	±51mm
C27-RM-RM-15	15	4572mm	+152/-51mm
C27-RM-RM-25	25	7620mm	+152/-51mm



NOTE:

1. CABLE: NON UL 26AWG\*1C+SPIRAL+JACKET PVC.COLOR:BLACK OD:2.8mm.
2. CONNECTOR: P1,P2:RCA MALE,NICKEL PLATED SHELL.
3. PACKING LIST:EACH CABLE IN A TNT PRINTED POLY-BAG.
- 4.ELECTRICAL PROPERTIES:
  - (1).IT SHALL HAVE NOT ANY OPEN/SHORT,MISWIRING AND INTERMITTENT.
  - (2).THE CABLE SHALL BE 100% ELECTRICAL TEST.
  - (3).INSULATION RESISTANCE:2M OHM MIN.
  - (4).CONDUCTANCE RESISTANCE:5 OHM MAX.
  - (5).HI-POT TEST:DC 300 MIN.

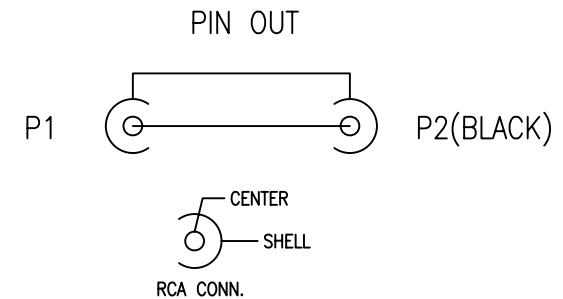

TOLERANCE INCHES			M/M			Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>		
.X	.015	.30	SCALE	NONE		REV	A	
.XX	.010	.10	UNIT	MM				
.XXX	.005	.05	SHEET	1/1	DWG NO.			
DRAWN BY			DATE	02/03/05	TITLE			
CHECK BY			RCA/M TO RCA/M					
APPD BY			PART NO. C27-RM-RM-XX					