



P/N	xx	L	T
C27-SM-2RM-06	06	1829mm	±51mm
C27-SM-2RM-10	10	3048mm	±51mm
C27-SM-2RM-15	15	4572mm	+152/-51mm
C27-SM-2RM-25	25	7620mm	+152/-51mm

PIN OUT

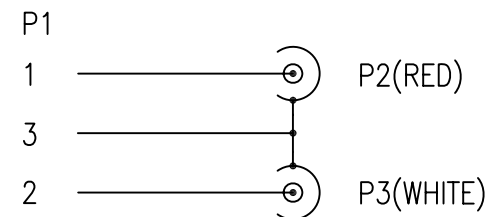

NOTE:

1. CABLE: NON UL (26AWG\*1C+SPIRAL)\*2F OD:2.8\*5.6mm,BLACK PVC JACKET.
2. CONNECTOR: P1:ø3.5mm STEREO PLUG,NICKEL PLATED.  
P2,P3:RCA MALE,NICKEL PLATED SHELL.
3. PACKING LIST:EACH CABLE IN A TNT PRINTED POLY-BAG.
- 4.ELECTRICAL PROPERTIES:
  - (1).IT SHALL HAVE NOT ANY OPEN/SHORT,MISWIRING AND INTERMITTENT.
  - (2).THE CABLE SHALL BE 100% ELECTRICAL TEST.
  - (3).INSULATION RESISTANCE:2M OHM MIN.
  - (4).CONDUCTANCE RESISTANCE:5 OHM MAX.
  - (5).HI-POT TEST:DC 300 MIN.



TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30		SCALE	NONE		REV	A	
.XX	.010	.10		UNIT	MM				
.XXX	.005	.05		SHEET	1/1				DWG NO.
DRAWN BY				DATE	11/27/05				
CHECK BY				TITLE ø3.5mm STEREO PLUG TO 2RCA/M					
APPD BY				PART NO. C27-SM-2RM-XX					