
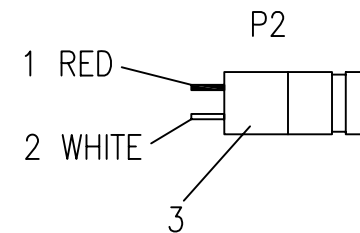


DC3.5 STEREO PLUG

DC3.5 STEREO JACK



P/N	xx	L	T
C27-SM-SF-06	06	1829mm	±51mm
C27-SM-SF-10	10	3048mm	±51mm
C27-SM-SF-15	15	4572mm	+152/-51mm
C27-SM-SF-25	25	7620mm	+152/-51mm

PIN OUT

P1	P2
1	1 RED
2	2 WHITE
3	3 SPIRAL

NOTE:

1. CABLE: NON UL 26AWG*2C(RED,WHITE)+SPIRAL SHIELDED+BLACK PVCJACKET.
OD:3.0mm.
2. CONNECTOR: P1:DC3.5mm STEREO PLUG,NICKEL PLATED.
P2:DC3.5mm STEREO JACK.
3. ALL HOOD MOLDED BLACK PVC.
4. P1 MOLD NO:TNT-DC35-01;P2 MOLD NO:TNT-DC35F-01.
5. PACKING: EACH CABLE IN A TNT PRINTED POLY-BAG.



TOLERANCE		INCHES		M/M		Tri-Net Technology, Inc. http://www.trinetusa.com				
.X	.015			.30		SCALE	NONE		REV A	
.XX	.010			.10		UNIT	MM			
.XXX	.005			.05		SHEET	1/1			
DRAWN BY						DATE	04/23/05		DWG NO.	
CHECK BY						TITLE				M3.5 ST/M TO 3.5 ST/F
APPD BY						PART NO.				C27-SM-SF-XX