


P2 SERIAL ATA 7PIN PLUG

P/N	INCH	L(mm)	T(mm)
D21-SATA-90-18	18	457	+10/-10
D21-SATA-90-24	24	610	+10/-10
D21-SATA-90-30	30	762	+15/-15
D21-SATA-90-36	36	914	+15/-15

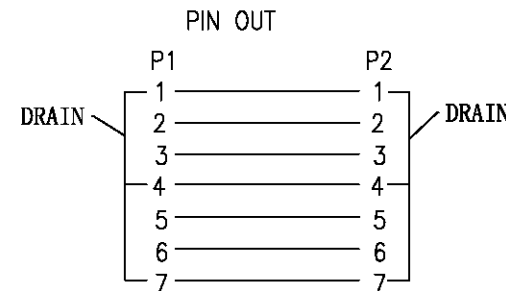

NOTES:

- CABLE: SERIAL ATA CABLE: {26AWG(1/0.404)*2C+AL.MY+ DRAIN WIRE[28AWG(1/0.32)*2C]}*2F, OD:2.3*8.30mm RED PVC JACKET. (TNT P/N:B-SATA-03).
- CONNECTOR: P1&P2 :SERIAL ATA 7PIN PLUG, CRIMPING TYPE, GOLD PLATED CONTACTS. (TNT P/N:C-SATA7M-03).
- HOOD: MOLDED BLACK PVC.
- 100% ELECTRICAL TEST.



TOLERANCE			TNT Tri-Net Technology, Inc.				
INCHES		M/M	http://www.trinetusa.com				
.X	.015	.30	SCALE	NONE		REV	C
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	1/2	DWG NO.		
DRAWN BY			DATE	06/19/04	TITLE		
CHECK BY			SATA 7M TO SATA 7M (90°)				
APPD BY			PART NO. D21-SATA-90-XX				