

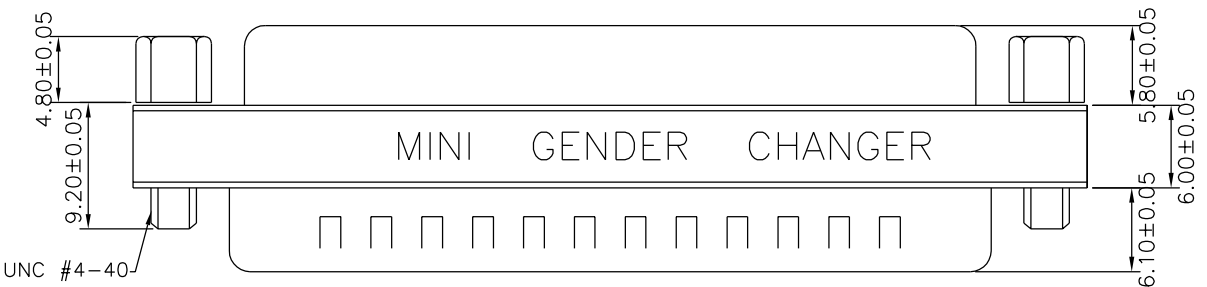



UNC #4-40 Hexscrew

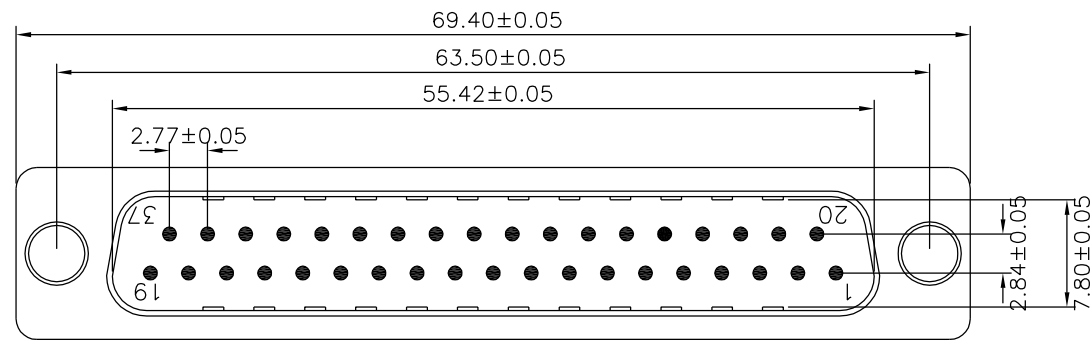

DGC 37 M/F GENDER CHANGER
PIN OUT: 37Male 37Female

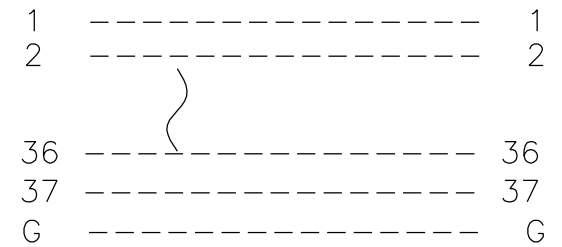

Label: yellow color with black character
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906 GENDER CHANGER
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000M Ω min at 500V DC
 TEMPERATURE: -55°C — +105°C

				Edition A01		TNT Tri-Net Technology, Inc					
				SCALE 2:1		PART NO. A01-37-MF		DWG NO. TD0011-02		DATE 2002/08/29	
				UNIT mm		VNLSS OTHER-WISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.00: ±0.15 0.000: ±0.05					
Customer REVISION		DESCRIPTION		DATE		Page 1/1		DRAWN PETER		CHECKED	
								APPRD			