


UNC #4-40X3.3mm
(THREAD)

UNC #4-40 Hexscrew




UNC #4-40 Hexnut

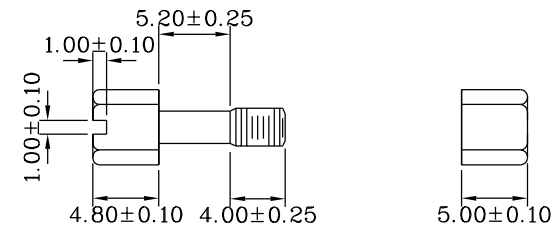

HGC 50 F/F GENDER CHANGER

PIN OUT: 50Female

50Female

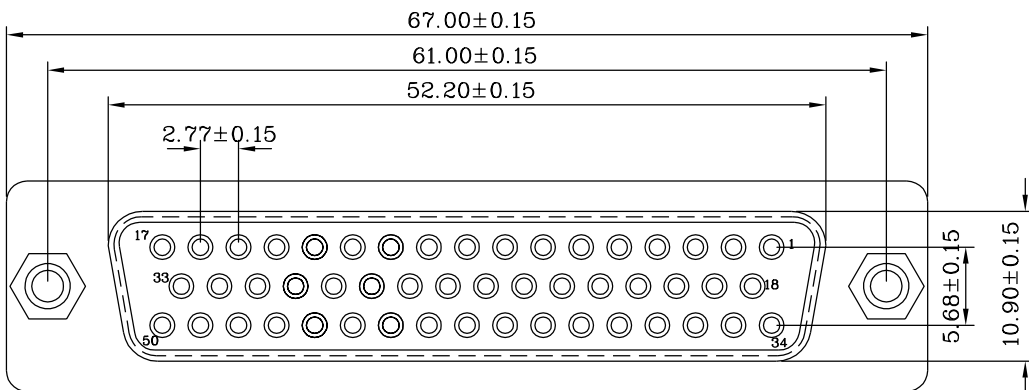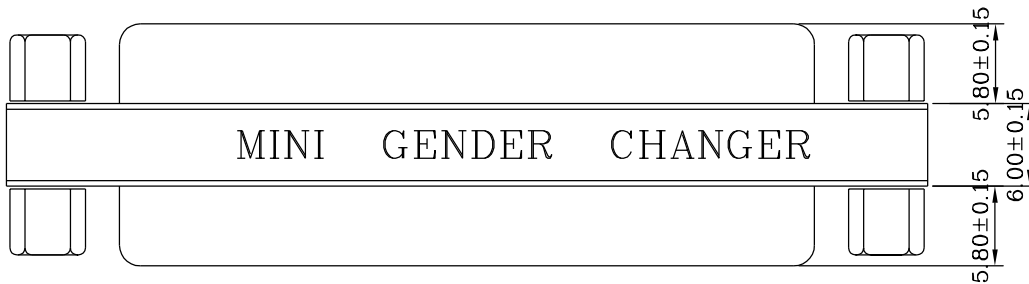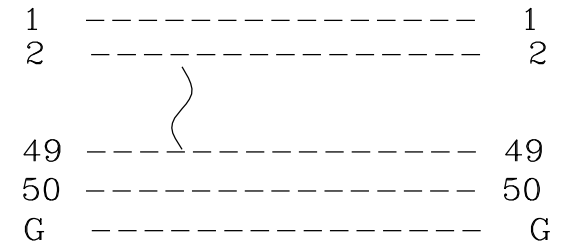

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500M Ω min at 500V DC

TEMPERATURE: -55°C — +105°C

				Edition A01	TNT Tri-Net Technology, Inc				
				SCALE 2:1	UNLESS OTHER-WISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.00: ±0.15 0.000: ±0.05	PART NO. A01-50-FF		DWG NO. TH0021-02	DATE 2002/08/29
				UNIT mm					
Customer	REVISION	DESCRIPTION	DATE	Page 1/1		DRAWN PETER	CHECKED	APPRD	