





UNC #4-40 Hexscrew

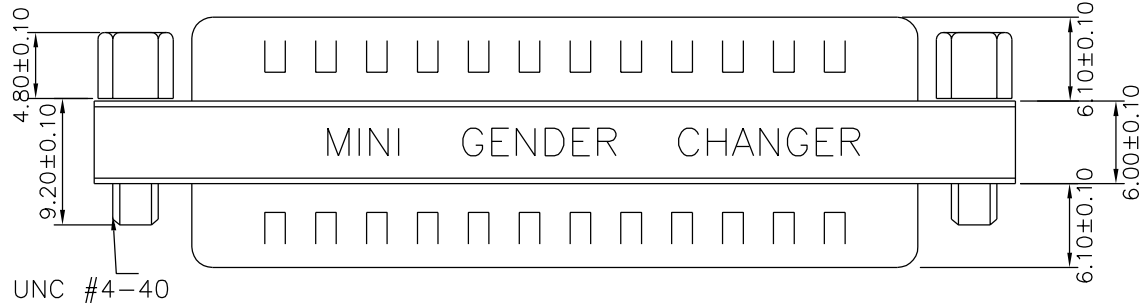

HGC 50 M/M GENDER CHANGER  
PIN OUT: 50Male 50Male

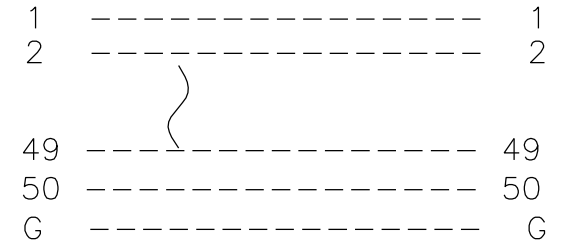

UNC #4-40

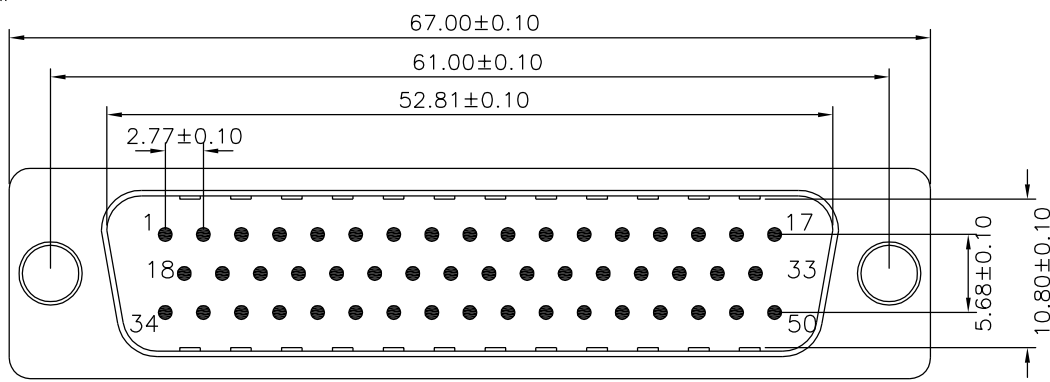

Label: yellow color with black character  
 One side: MINI GENDER CHANGER  
 The other side: U.S.A. PATENT 5199906 GENDER CHANGER  
 SPECIFICATION  
 INSULATOR: PBT Glass fibre reinforced UL 94 V0  
 CONTACT: Brass  
 CONTACT PLATING: Gold plated over nickel  
 SHELL: Tin plated shell  
 CURRENT RATING: 3 AMP  
 DIELECTRIC STRENGTH: 500V AC for one minute  
 INSULATOR RESISTANCE: 500M Ω min at 500V DC  
 TEMPERATURE: -55°C — +105°C

				Edition A01	<b>TNT</b> Tri-Net Technology, Inc				
				SCALE 2:1	UNLESS OTHER-WISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.00: ±0.15 0.000: ±0.05	PART NO. A01-50-MM		DWG NO. TH0019-02	DATE 2002/08/29
				UNIT mm		DRAWN PETER	CHECKED	APPRD	
Customer	REVISION	DESCRIPTION	DATE	Page 1/1					