


DETAIL A

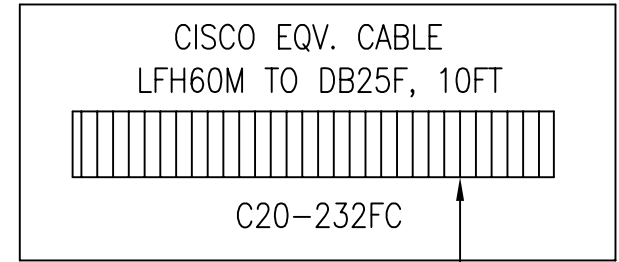

BAR CODE: 39


NOTES:

1. CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL20276, DARK GREY(CTG-841) PVC JACKET.
 2. CONNECTOR: P1: D-SUB 25 FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION. P2: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
 3. THUMB SCREW TO BE MOLDED DARK GREY(CTG-841) PVC.
 4. ALL HOOD: MOLDED DARK GREY(CTG-841) PVC.
 5. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
 6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
 7. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
- BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.



TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
M/M			SCALE	NONE	REV	D
.X	.015	.30	UNIT	MM		
.XX	.010	.10	DATE	09/12/06		
.XXX	.005	.05	TITLE			
DRAWN BY			DB25 FEMALE TO LFH 60 MALE			
CHECK BY			PART NO.			
APPD BY			C20-232FC			

PIN OUT
DB25F ————— LFH60 MALE

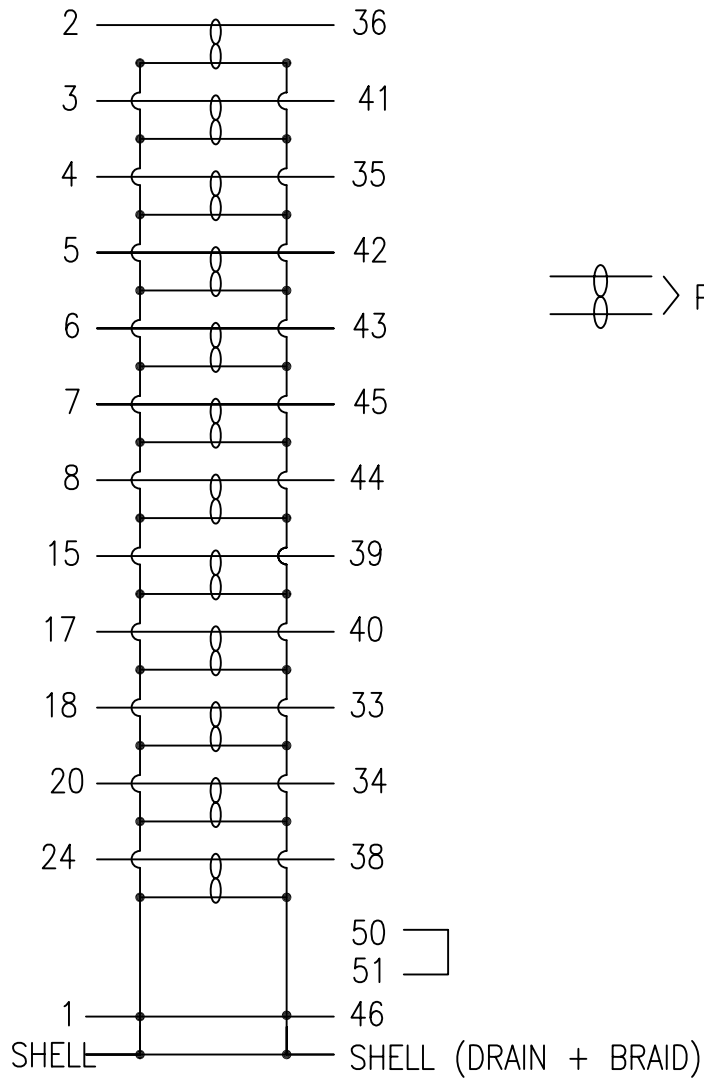

TOLERANCE			Tri-Net Technology, Inc. http://www.trinetusa.com			
INCHES	M/M					
.X	.015	.30		SCALE	NONE	REV D
.XX	.010	.10		UNIT	MM	
.XXX	.005	.05		DATE	09/12/06	
DRAWN BY				SHEET	2/2	DWG NO.
CHECK BY				TITLE	DB25 FEMALE TO LFH 60 MALE	
APPD BY				PART NO.	C20-232FC	

