


NOTES:

1. CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL20276, DARK GREY(CTG-841) PVC JACKET.
2. CONNECTOR: P1: D-SUB 25 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
P2: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
3. THUMB SCREW TO BE MOLDED DARK GREY(CTG-841) PVC.
4. ALL HOOD: MOLDED DARK GREY(CTG-841) PVC.
5. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
7. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.


DETAIL A

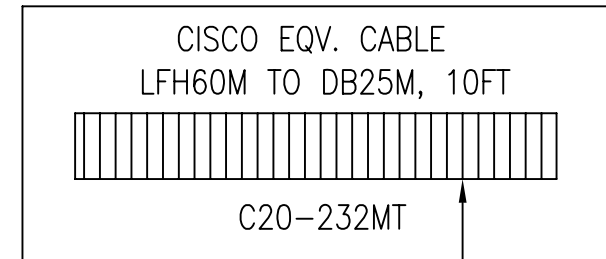

BAR CODE: 39

TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
		M/M	SCALE	UNIT	REV	D
.X	.015	.30	NONE			
.XX	.010	.10	MM			
.XXX	.005	.05				
DRAWN BY			SHEET	1/2	DWG NO.	
			DATE	09/12/06		
CHECK BY			TITLE DB25 MALE TO LFH 60 MALE			
APPD BY			PART NO. C20-232MT			



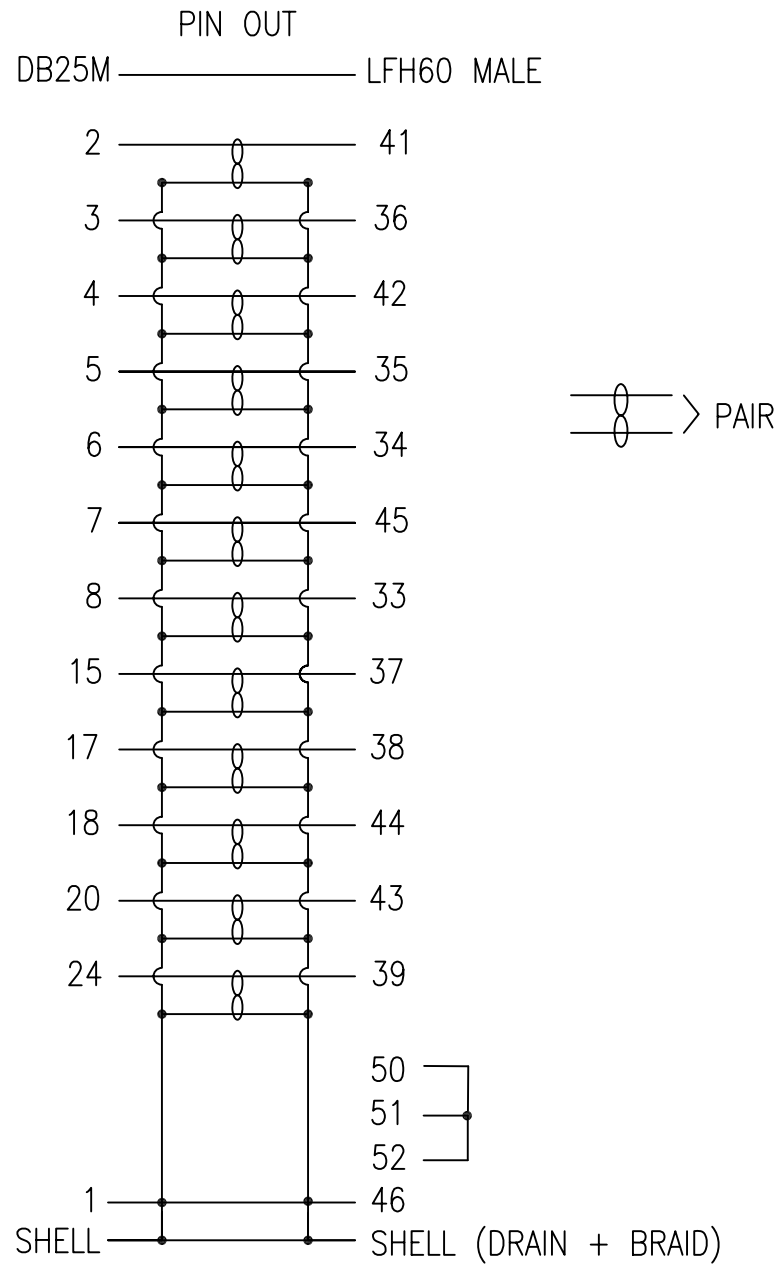

TOLERANCE INCHES			M/M	TNT Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE		REV	D
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	2/2	DWG NO.		
DRAWN BY			DATE	09/12/06			
CHECK BY			TITLE DB25 MALE TO LFH 60 MALE				
APPD BY			PART NO. C20-232MT				

