


DETAIL A

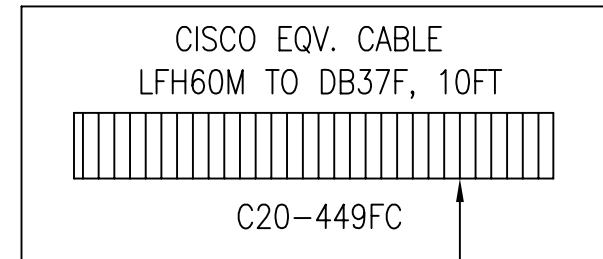

BAR CODE: 39

NOTES:
















- 1. CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL20276, DARK GREY(CTG-841) PVC JACKET.
- 2. CONNECTOR: P1: D-SUB 37 FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION. P2: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
- 3. THUMB SCREW TO BE MOLDED DARK GREY(CTG-841) PVC.
- 4. ALL HOOD: MOLDED DARK GREY(CTG-841) PVC.
- 5. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
- 7. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG. BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.



TOLERANCE			Tri-Net Technology, Inc.				
INCHES	M/M		http://www.trinetusa.com				
.X	.015	.30	SCALE	NONE		REV	D
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	1/2	DWG NO.		
DRAWN BY			DATE	09/12/06			
CHECK BY			TITLE				
APPD BY			DB37 FEMALE TO LFH 60 MALE				
			PART NO. C20-449FC				

PIN OUT

DB37F \_\_\_\_\_ LFH60 MALE      DB37F \_\_\_\_\_ LFH60 MALE



TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		<a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015	.30	SCALE	NONE	REV	D
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/12/06		
CHECK BY			TITLE DB37 FEMALE TO LFH 60 MALE			
APPD BY			PART NO. C20-449FC			