


NOTES:

1. CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL20276, DARK GREY(CTG-841) PVC JACKET.
 2. CONNECTOR: P1: D-SUB 37 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
P2: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
 3. THUMB SCREW TO BE MOLDED DARK GREY(CTG-841) PVC.
 4. ALL HOOD: MOLDED DARK GREY(CTG-841) PVC.
 5. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
 6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
 7. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
- BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE "DETAIL A") TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.

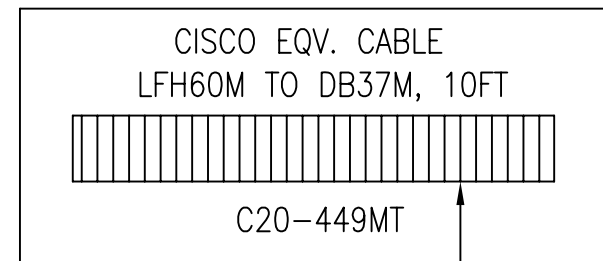





BAR CODE: 39

TOLERANCE			Tri-Net Technology, Inc.			
INCHES		M/M			http://www.trinetusa.com	
.X	.015	.30	SCALE	NONE	REV	D
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2	DWG NO.	
DRAWN BY			DATE	09/12/06		
CHECK BY			TITLE DB37 MALE TO LFH 60 MALE			
APPD BY			PART NO. C20-449MT			





PIN OUT

DB37M _____ LFH60 MALE

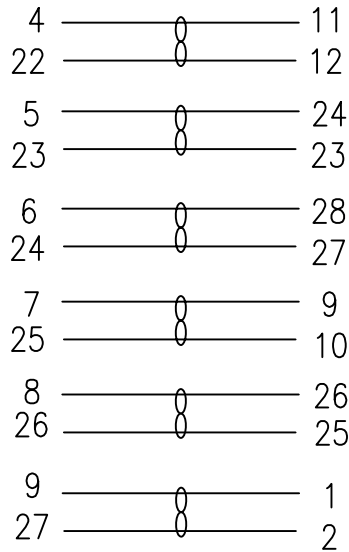

DB37M _____ LFH60 MALE

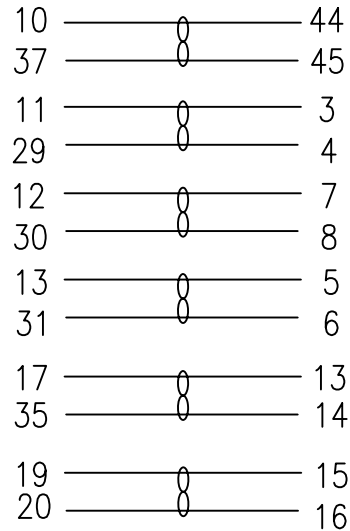

TOLERANCE INCHES			M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE		REV	D	
.XX	.010	.10	UNIT	MM				
.XXX	.005	.05	DRAWN BY		SHEET	2/2	DWG NO.	
CHECK BY			DATE		09/12/06		TITLE	
APPD BY			PART NO.		DB37 MALE TO LFH 60 MALE			
					C20-449MT			