





NOTES:

1. CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID(85%min) SHIELDED WITH DRAIN WIRE, UL20276, DARK GREY(CTG-841) PVC JACKET.
2. CONNECTOR: P1: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.  
P2: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
3. THUMB SCREW TO BE MOLDED DARK GREY(CTG-841) PVC.
4. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
5. ALL HOOD: MOLDED DARK GREY(CTG-841) PVC.
6. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
7. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.  
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.

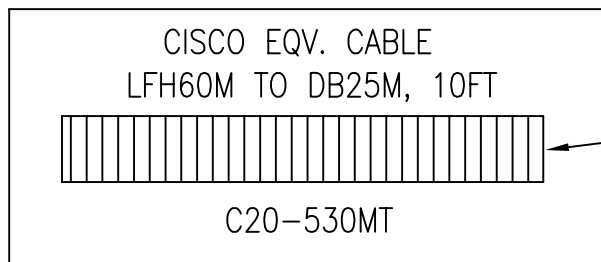

TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
		M/M	SCALE	NONE	REV	D
.X	.015	.30	UNIT	MM		
.XX	.010	.10	SHEET	1/2	DWG NO.	
.XXX	.005	.05	DATE	09/12/06		
DRAWN BY			TITLE	DB25 MALE TO LFH 60 MALE		
CHECK BY			PART NO.	C20-530MT		
APPD BY						

DB25M ————— PIN OUT ————— LFH60 MALE

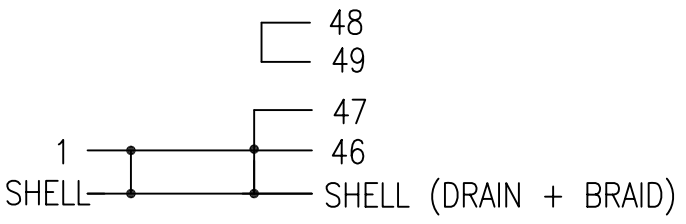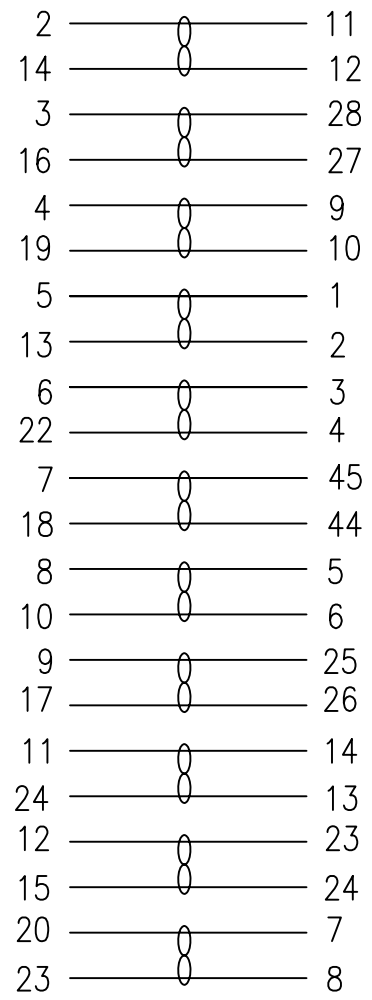

TOLERANCE			Tri-Net Technology, Inc.	
INCHES			<a href="http://www.trinetusa.com">http://www.trinetusa.com</a>	
		M/M	SCALE	NONE
.X	.015	.30	UNIT	MM
.XX	.010	.10	DATE	09/12/06
.XXX	.005	.05	SHEET	2/2
DRAWN BY			DATE	09/12/06
CHECK BY			TITLE	
APPD BY			DB25 MALE TO LFH 60 MALE	
			PART NO.	
			C20-530MT	