


NOTE:

- △ CABLE: 28AWG X 9PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL CL2 + CSA FT4, BLUE(CTG-615, PANTONE/#300C) PVC JACKET.
- 2. CONNECTOR: P1: CISCO 26PIN MALE: 1.0mm PITCH, GOLD FLASH CONTACTS, WHITE PBT INSULATION.
P2: D-SUB 25 FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
- △ METAL SCREW.
- △ THUMB SCREW TO BE MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 5. SHIELDING: P1: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.
P2: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 6. ALL HOOD: MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 7. TESTING:
 - 1. 100% OPEN/SHORT TEST.
 - 2. CONTACT RESISTANCE: <math>< 2\Omega</math>.
 - 3. INSULATION RESISTANCE: DC300V AT 10ns $R > 10M\Omega$.
- 8. PACKING: EACH CABLE IN A PE POLY-BAG. LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON PE POLY-BAG.

C20-SS-232FC-10



TOLERANCE			Tri-Net Technology, Inc. http://www.trinetusa.com			
INCHES	M/M					
.X	.015	.30	SCALE	NONE		REV D
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2	DWG NO.	
DRAWN BY			DATE	09/12/06		
CHECK BY			TITLE NP26M/DB25F CABLE			
APPD BY			PART NO. C20-SS-232FC			

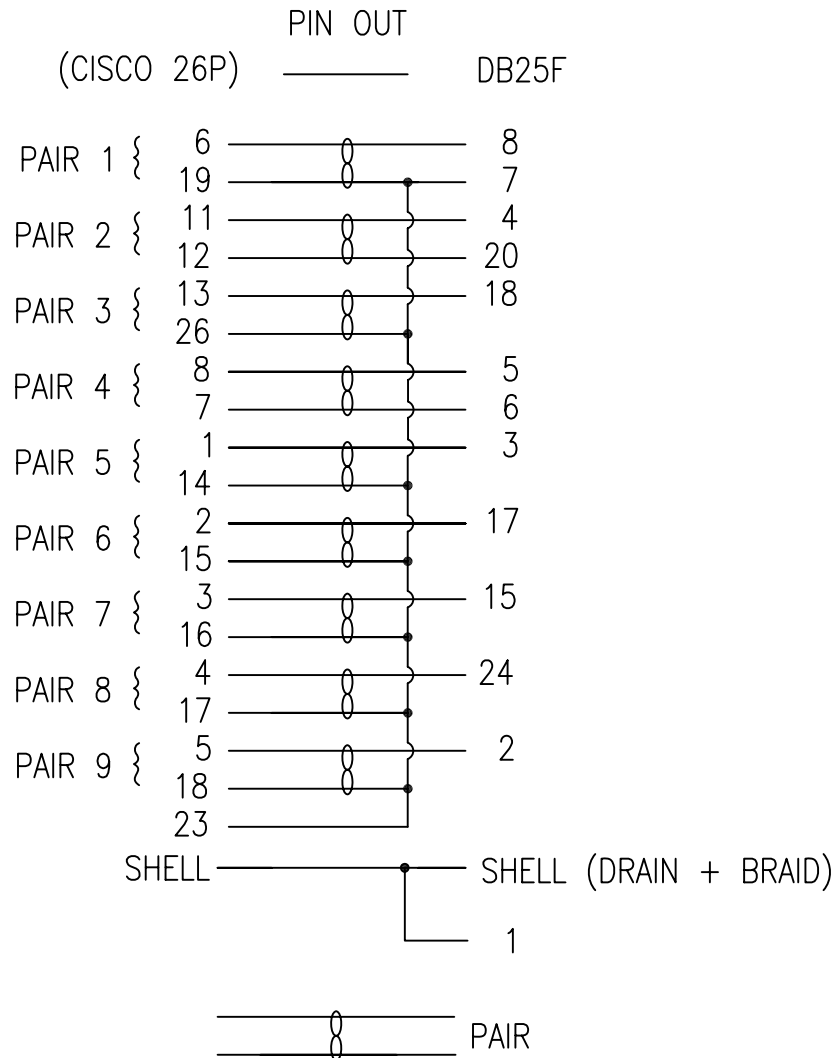

TOLERANCE			Tri-Net Technology, Inc.				
INCHES	M/M		http://www.trinetusa.com				
.X	.015	.30	SCALE	NONE	⊕	REV	D
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05			DWG NO.		
DRAWN BY			SHEET	2/2	DATE		
			09/12/06				
CHECK BY			TITLE				
			NP26M/DB25F CABLE				
APPD BY			PART NO.				
			C20-SS-232FC				