



NOTE:

- 1. CABLE: 28AWG X 9PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL CL2 + CSA FT4, BLUE(CTG-615, PANTONE/#300C) PVC JACKET.
- 2. CONNECTOR: P1: CISCO 26PIN MALE: 1.0mm PITCH, GOLD FLASH CONTACTS, WHITE PBT INSULATION.  
P2: D-SUB 25 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
- 3. METAL SCREW.
- 4. THUMB SCREW TO BE MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 5. SHIELDING: P1: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.  
P2: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 6. ALL HOOD: MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 7. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
- 8. PACKING: EACH CABLE IN A PE POLY-BAG. LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON PE POLY-BAG.

TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
	M/M		SCALE	NONE	REV	D
.X	.015	.30	UNIT	MM		
.XX	.010	.10	SHEET	1/2	DWG NO.	
.XXX	.005	.05	DATE	09/12/06		
DRAWN BY			TITLE			
CHECK BY			EIA/TIA-232 DTE Smart Serial			
APPD BY			PART NO. C20-SS-232MT			



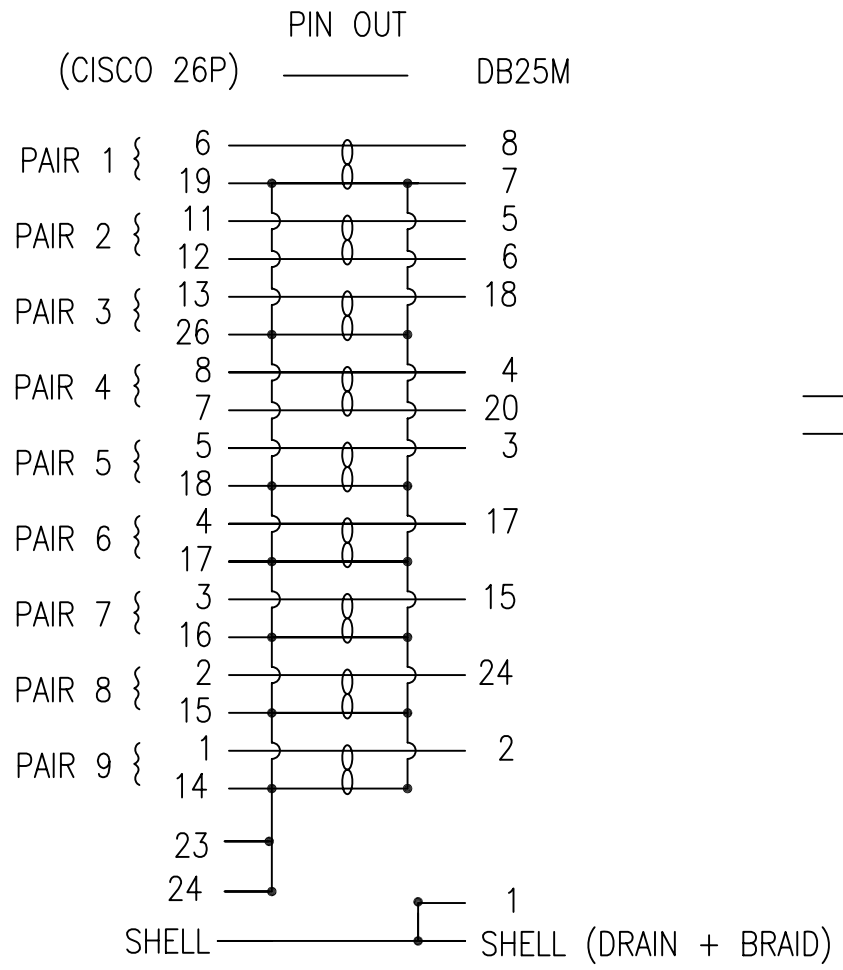

TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		<a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015	.30	SCALE	NONE	⊕	D
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05			REV	
DRAWN BY			SHEET	2/2	DWG NO.	
			DATE	09/12/06		
CHECK BY			TITLE EIA/TIA-232 DTE Smart Serial			
APPD BY			PART NO. C20-SS-232MT			