

NOTE:

- 1. CABLE: 28AWG X 12PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL2919, BLUE(CTG-615, PANTONE/#300C) PVC JACKET.
- 2. CONNECTOR: P1: CISCO 26PIN MALE: 1.0mm PITCH, GOLD FLASH CONTACTS, WHITE PBT INSULATION.
P2: D-SUB 37PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
- 3. METAL SCREW (NICKEL).
- 4. THUMB SCREW TO BE MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 5. SHIELDING: P1: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.
P2: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 6. ALL HOOD: MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 7. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
- 8. PACKING: EACH CABLE IN A CLEAR ZIP-LOCK POLY-BAG.
LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON CLEAR ZIP-LOCK POLY-BAG.




TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
	M/M		SCALE	NONE	REV	D
.X	.30		UNIT	MM		
.XX	.10		SHEET	1/2	DWG NO.	
.XXX	.05		DATE	09/12/06		
DRAWN BY			TITLE EIA/TIA-449 DTE Smart Serial			
CHECK BY			PART NO. C20-SS-449MT			
APPD BY						



PIN OUT

(CISCO 26P) (DB37M)

P1 ————— P2

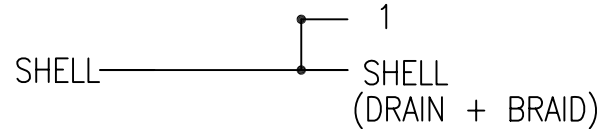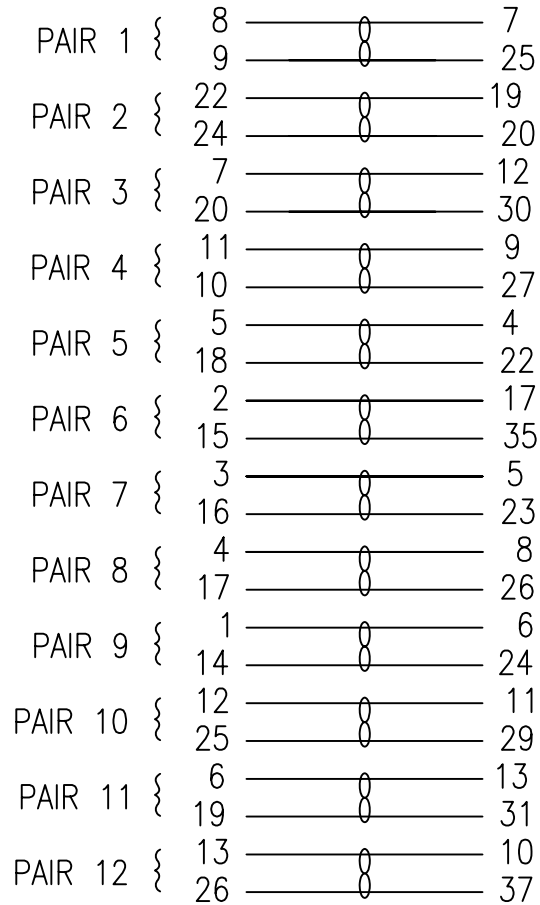

TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV D	
DRAWN BY		SHEET 2/2		DWG NO.
		DATE 09/12/06		
CHECK BY		TITLE EIA/TIA-449 DTE Smart Serial		
APPD BY		PART NO. C20-SS-449MT		