



NOTE:

- ① CABLE: 28AWG X 12PAIRS, AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE, UL2919, BLUE(CTG-615, PANTONE/#300C) PVC JACKET.
- 2. CONNECTOR: P1: CISCO 26PIN MALE: 1.0mm PITCH, GOLD FLASH CONTACTS, WHITE PBT INSULATION.
P2: D-SUB 25 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
- ③ METAL SCREW.
- ④ THUMB SCREW TO BE MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 5. SHIELDING: P1: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.
P2: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 6. ALL HOOD: MOLDED BLUE(CTG-615, PANTONE/#300C) PVC.
- 7. TESTING:
 - 1. 100% OPEN/SHORT TEST.
 - 2. CONTACT RESISTANCE: $< 2\Omega$.
 - 3. INSULATION RESISTANCE: DC300V AT 10ns $R > 10M\Omega$.
- 8. PACKING: EACH CABLE IN A CLEAR ZIP-LOCK POLY-BAG.
LABEL (WHITE BACKGROUND WITH BLACK LETTERS, SEE DETAIL "A")
TO BE STAMPED ON CLEAR ZIP-LOCK POLY-BAG.



TOLERANCE			Tri-Net Technology, Inc.			
INCHES			http://www.trinetusa.com			
	M/M		SCALE	NONE	REV	D
.X	.015	.30	UNIT	MM		
.XX	.010	.10	SHEET	1/2	DATE 09/12/06	
.XXX	.005	.05	TITLE			
DRAWN BY			EIA-530 DTE Smart Serial			
CHECK BY			PART NO.			
APPD BY			C20-SS-530MT			

PIN OUT

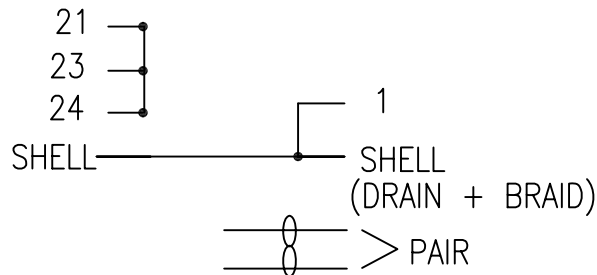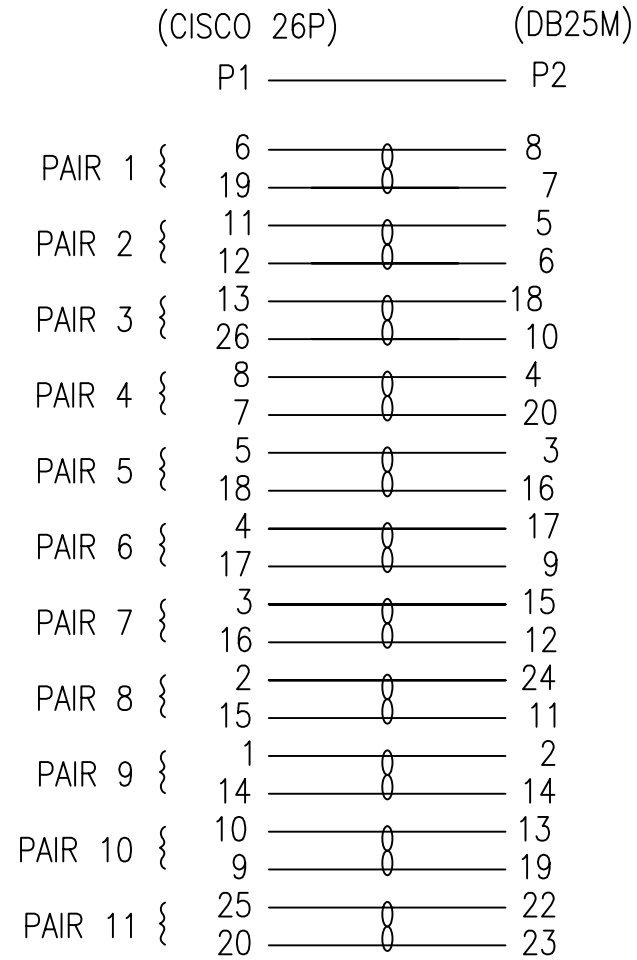

TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	DATE	09/12/06
DRAWN BY		SHEET	2/2	DWG NO.
CHECK BY		TITLE	EIA-530 DTE Smart Serial	
APPD BY		PART NO.	C20-SS-530MT	