


NOTES:




- ① CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID (85%min) SHIELDED WITH DRAIN WIRE, UL20276, DARK GREY (CTG-841) PVC JACKET.
- 2. CONNECTOR: P1: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
P2: V.35 FEMALE: CRIMP TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION, WITH SHELL.
- ③ THUMB SCREW TO BE MOLDED DARK GREY (CTG-841) PVC.
- ④ METAL SCREW.
- ⑤ METAL SCREW LOCK.
- 6. ALL HOOD: MOLDED DARK GREY (CTG-841) PVC.
- 7. SHIELDING: P1: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
P2: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.
- 8. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
- 9. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.




TOLERANCE INCHES			M/M			Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV D				
.XX	.010	.10	UNIT	MM					
.XXX	.005	.05							
DRAWN BY			SHEET	1/2	DWG NO.				
CHECK BY			DATE	09/12/06					
APPD BY			TITLE	LFT 60 MALE TO V3.5 FEMALE					
			PART NO.	C20-V35FC					

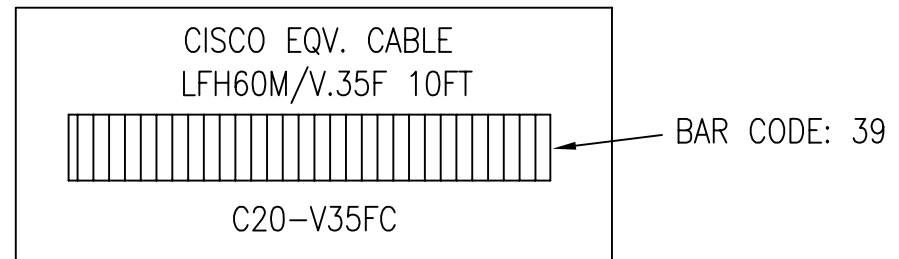

PIN OUT

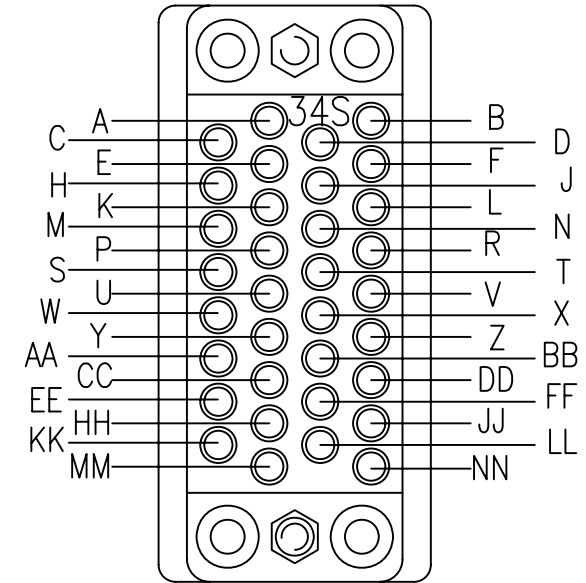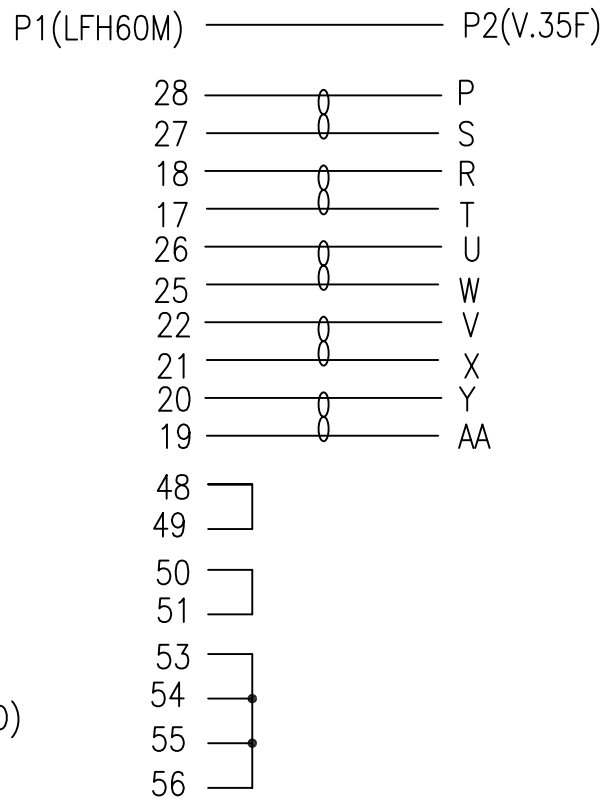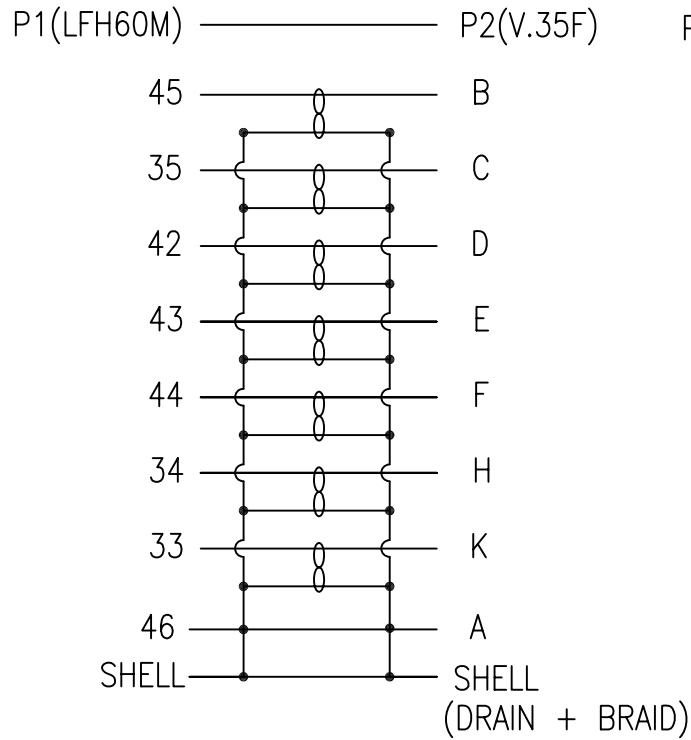

V.35 FEMALE FRONT VIEW



TOLERANCE INCHES			M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV D	DWG NO.		
.XX	.010	.10	UNIT	MM				
.XXX	.005	.05	SHEET	2/2	DATE			09/12/06
DRAWN BY			TITLE		LFT 60 MALE TO V3.5 FEMALE			
CHECK BY			PART NO.		C20-V35FC			
APPD BY								