


NOTES:




- ① CABLE: 28AWG X 13PAIRS, AL-FOIL AND BRAID (85%min) SHIELDED WITH DRAIN WIRE, UL20276, DARK GREY (CTG-841) PVC JACKET.
- 2. CONNECTOR: P1: L.F.H 60 MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
P2: V.35 MALE: CRIMP TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION, WITH SHELL.
- ③ THUMB SCREW TO BE MOLDED DARK GREY (CTG-841) PVC.
- ④ METAL SCREW.
- ⑤ METAL SCREW LOCK.
- 6. ALL HOOD: MOLDED DARK GREY (CTG-841) PVC.
- 7. SHIELDING: P1: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
P2: COPPER FOIL TAPE COVER PREMOLD AND POINT SOLDER TO CONNECTOR SHELL, 360° SOLDER TO CABLE BRAID.
- 8. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
- 9. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.




TOLERANCE INCHES		M/M	TNT Tri-Net Technology, Inc. http://www.trinetusa.com				
.X	.015	.30	SCALE	NONE	⊕	REV	D
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	1/2	DWG NO.		
DRAWN BY			DATE	09/12/06			
CHECK BY			TITLE LFT 60 MALE TO V.35 MALE				
APPD BY			PART NO. C20-V35MT				

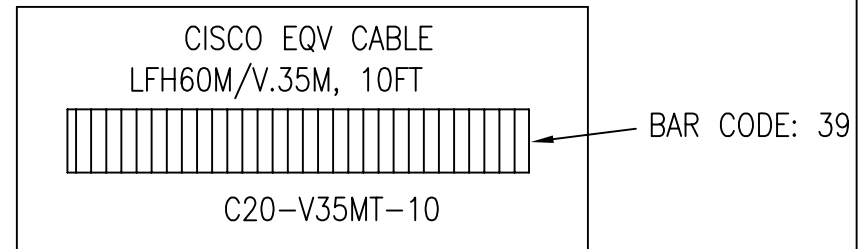

PIN OUT

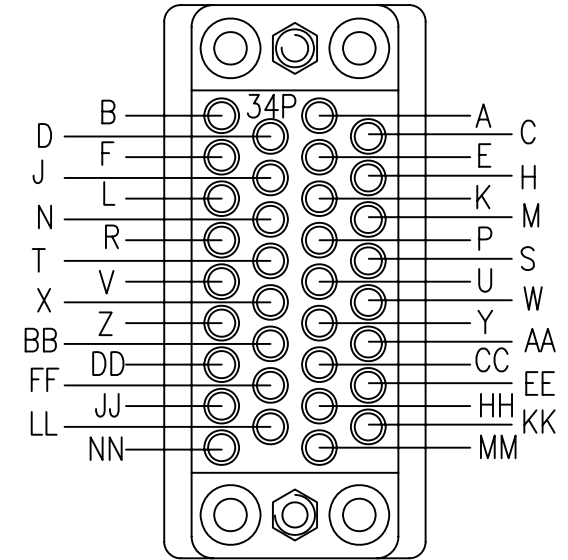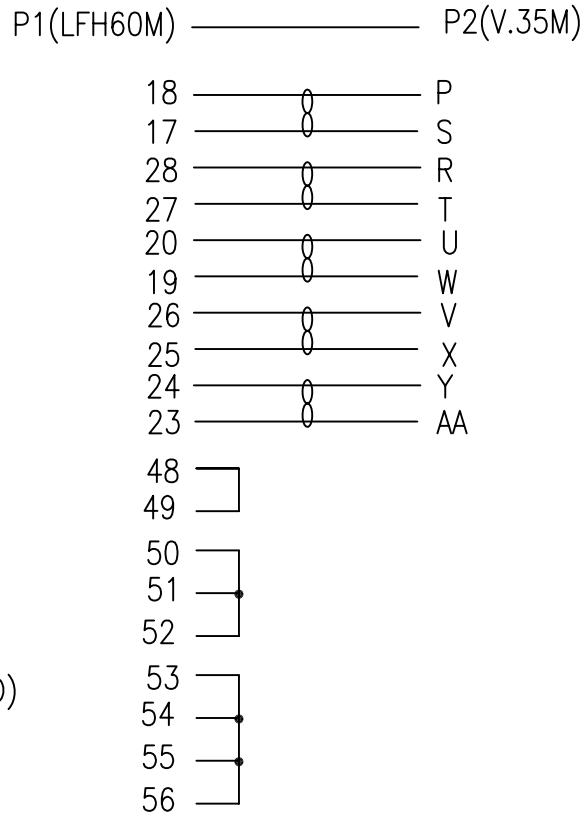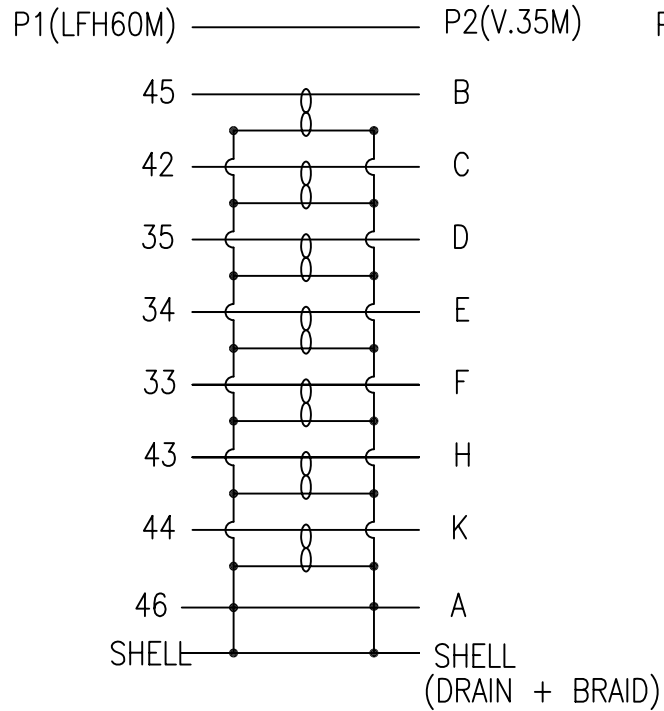

V.35 MALE FRONT VIEW



TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV	D
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/12/06		
CHECK BY			TITLE			
			LFT 60 MALE TO V.35 MALE			
APPD BY			PART NO.			
			C20-V35MT			