

NOTES:

- 1. CABLE: 28AWG X 25PAIRS+AL.MYLAR+DRAIN+BRAID, UL20276 BEIGE (BG-02) PVC JACKET, OD: 9.0mm.
- 2. CONNECTOR:  
P1 & P2: CENTRONICS 50PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK INSULATION, FRONT NICKEL AND REAR TIN PLATED SHELL.
- 3. SHIELDING: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONTACTOR SHELL & BRAID.
- 4. ALL HOOD: MOLDED BEIGE (BG-02) 45P PVC.
- 5. TESTING: 100% ELECTRICAL TESTING.
- 6. MOLD NO.: CN50-MSM-01, CN50-MSM-N01.



















































CHART 1

P/N	L	T
D01-C50-C50-10-T	3048	+50/-0
D01-C50-C50-06-T	1829	+50/-0
D01-C50-C50-03-T	914	+25/-0
D01-C50-C50-1.5-T	457	+25/-0






TOLERANCE		INCHES		M/M		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015			.30		SCALE	NONE		REV    A
.XX	.010			.10		UNIT	MM		
.XXX	.005			.05		SHEET	1/2		DWG NO.
DRAWN BY						DATE	09/07/06		
CHECK BY						TITLE CN50M TO CN50M			
APPD BY						PART NO. D01-C50-C50-XX-T			

WIRE LIST

	P1	—————	P2		P1	—————	P2
PAIR 18 {	1		1	PAIR 13 {	14		14
	26		26		39		39
PAIR 14 {	2		2	PAIR 2 {	15		15
	27		27		40		40
PAIR 23 {	3		3	PAIR 15 {	16		16
	28		28		41		41
PAIR 4 {	4		4	PAIR 16 {	17		17
	29		29		42		42
PAIR 5 {	5		5	PAIR 17 {	18		18
	30		30		43		43
PAIR 6 {	6		6	PAIR 1 {	19		19
	31		31		44		44
PAIR 7 {	7		7	PAIR 19 {	20		20
	32		32		45		45
PAIR 8 {	8		8	PAIR 20 {	21		21
	33		33		46		46
PAIR 9 {	9		9	PAIR 21 {	22		22
	34		34		47		47
PAIR 10 {	10		10	PAIR 22 {	23		23
	35		35		48		48
PAIR 11 {	11		11	PAIR 3 {	24		24
	36		36		49		49
PAIR 12 {	12		12	PAIR 24 {	25		25
	37		37		50		50
PAIR 25 {	13		13	SHELL	—————	—————	SHELL
	38		38				

CABLE CONSTRUCTION DRAWING

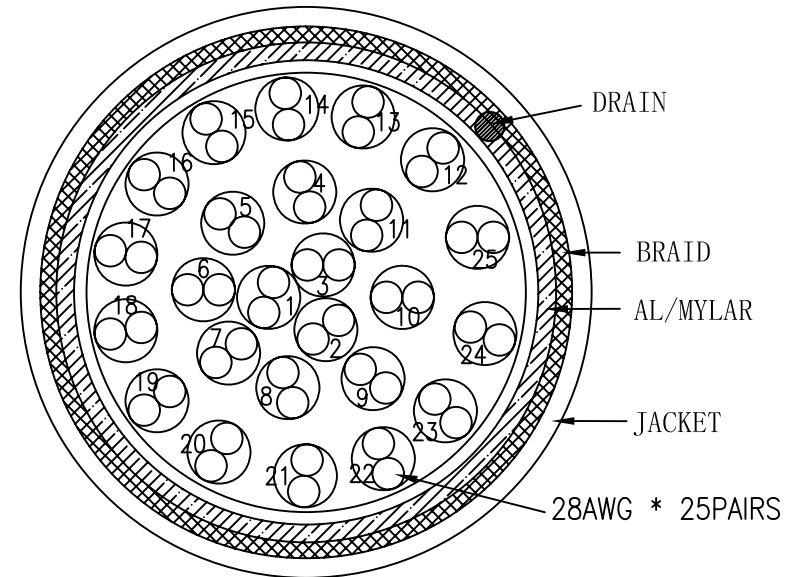

TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	 REV    A	
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/07/06		
CHECK BY			TITLE			
APPD BY			CN50M TO CN50M			
			PART NO. D01-C50-C50-XX-T			