

NOTE:

- 1. CABLE: 28AWG X 19PAIRS, AL-FOIL AND BRAID(85%min) SHIELDED WITH DRAIN WIRE, UL2990 + CUL IA FT1, BEIGE(CTG-401) PVC JACKET.
- 2. CONNECTOR: P1: CENTRONICS 50PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
P2: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- 3. THUMB SCREW TO BE MOLDED.
- 4. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG, BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED) TO BE STAMPED ON POLYBAG.



CHART 1

P/N	L	T	**	XX
D01-C50-D25-03-T	914	±25	3	03
D01-C50-D25-06-T	1829	±51	6	06




TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc.		http://www.trinetusa.com	
.X	.015	.30				SCALE	NONE	REV	A
.XX	.010	.10				UNIT	MM		
.XXX	.005	.05				SHEET	1/2	DWG NO.	
DRAWN BY						DATE		09/07/06	
CHECK BY						TITLE		CN50M TO DB25	
APPD BY						PART NO.		D01-C50-D25-XX-T	

PIN OUT

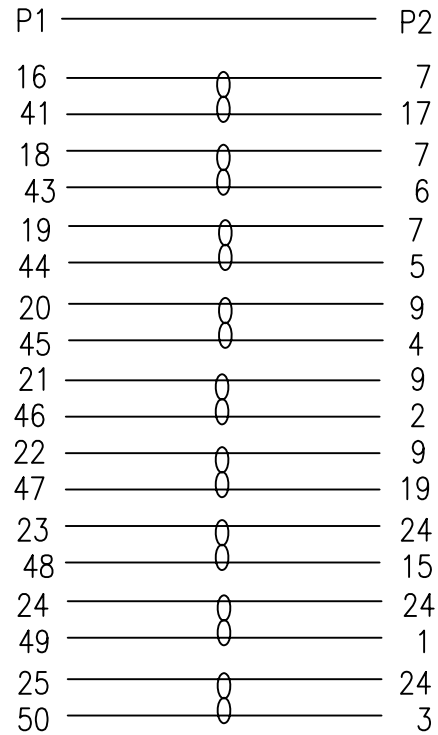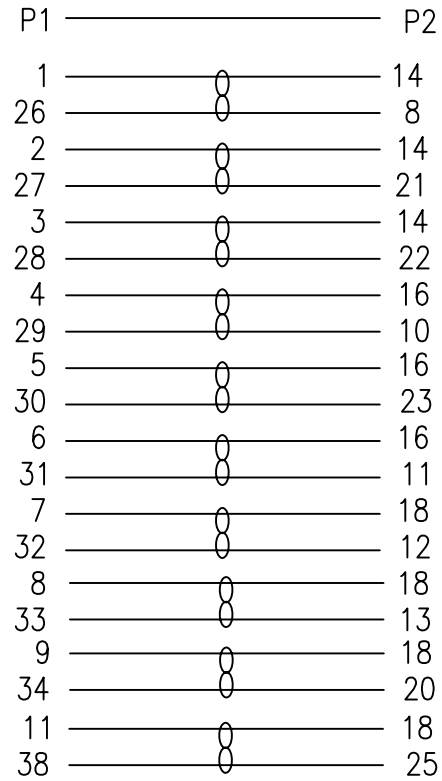

SHELL ————— SHELL(BRAID + DRAIN WIRE)



TOLERANCE			Tri-Net Technology, Inc.			
	INCHES	M/M			http://www.trinetusa.com	
.X	.015	.30	SCALE	NONE		REV A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/07/06		
CHECK BY			TITLE CN50M TO DB25			
APPD BY			PART NO. D01-C50-D25-XX-T			