

NOTE:





- 1. CABLE: 28AWG X 25PAIRS (CONDUCTOR OD= $\phi 0.62 \pm 0.05$ mm)+AL.MYLAR+DRAIN+BRAID, UL20276, BEIGE (BG-02) PVC JACKET.OD:9.0 ± 0.15 MM.
- 2. CONNECTOR: P1 & P2: HALF PITCH CENTRONICS 50PIN MALE: RIBBON AND IDC TYPE, 0.62MM WIRE HOLDER, GOLD FLASH CONTACTS, BLACK INSULATION, NICKEL PLATED SHELL.
- 3. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 4. ALL HOOD: MOLDED BEIGE (BG-02) PVC.
- 5. TESTING: 100% ELECTRICAL TESTING.
- 6. MOLD NO.: COVER-HP50; HPCN50-MSM-01; HPCN50-MSM-N01.

CHART 1

| P/N | L | T |
|-------------------|------|--------|
| D06-SC50-SC50-1.5 | 457 | +25/-0 |
| D06-SC50-SC50-03 | 914 | +25/-0 |
| D06-SC50-SC50-06 | 1829 | +50/-0 |



| TOLERANCE | | INCHES | | M/M | | TNT Tri-Net Technology, Inc. http://www.trinetusa.com | | | |
|-----------|------|--------|--|-------|----------|--|-----|---|---------|
| .X | .015 | .30 | | SCALE | NONE | | REV | A | DWG NO. |
| .XX | .010 | .10 | | UNIT | MM | | | | |
| .XXX | .005 | .05 | | SHEET | 1/2 | DATE 09/07/06 | | | |
| DRAWN BY | | | | | TITLE | HPCN50M TO HPCN50M | | | |
| CHECK BY | | | | | PART NO. | D06-SC50-SC50-XX | | | |
| APPD BY | | | | | | | | | |

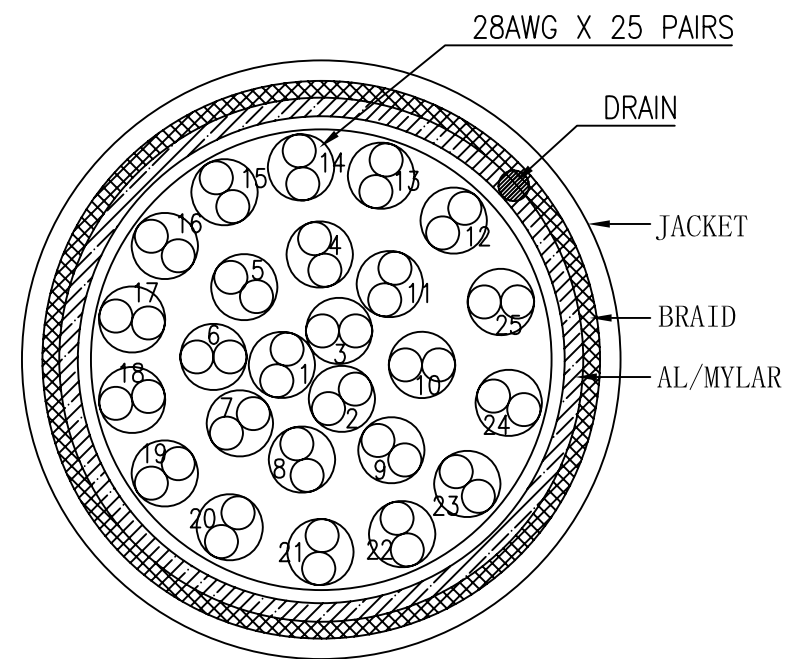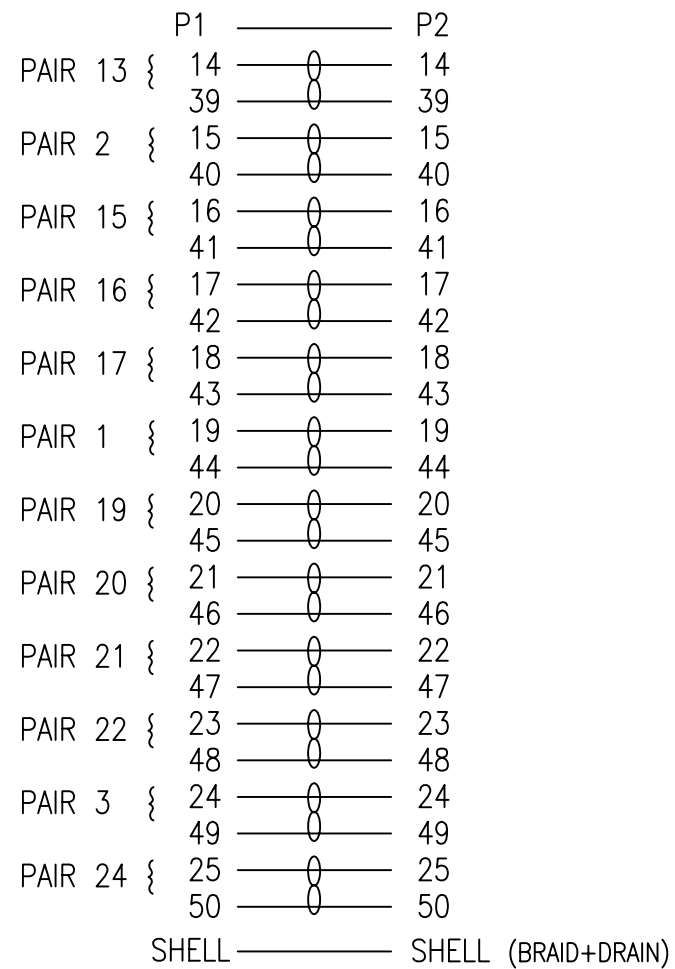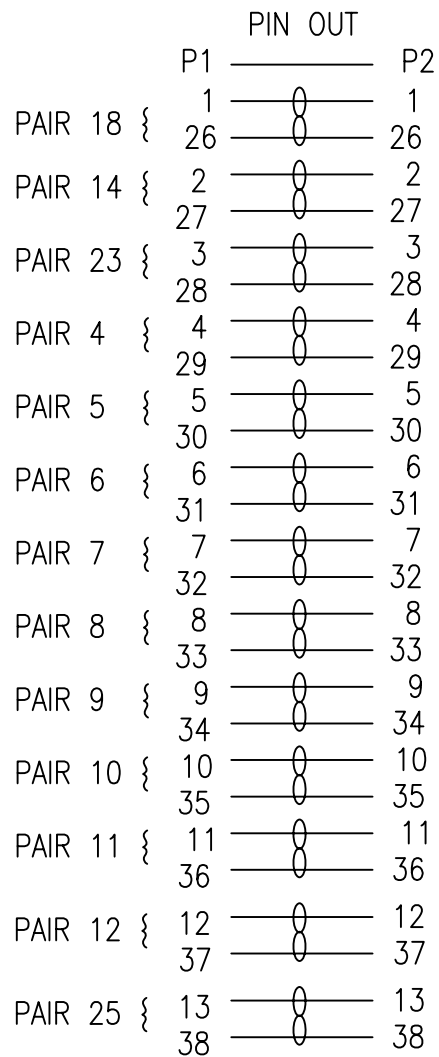

CABLE CONSTRUCTION DRAWING

| | | | | | | | |
|-----------|------|-------|---|----------|--------------------|---|------|
| TOLERANCE | | | Tri-Net Technology, Inc. http://www.trinetusa.com | | REV | A | |
| INCHES | M/M | SCALE | | | | | NONE |
| .X | .015 | .30 | | | | | UNIT |
| .XX | .010 | .10 | SHEET | 2/2 | DWG NO. | | |
| .XXX | .005 | .05 | DATE | 09/07/06 | HPCN50M TO HPCN50M | | |
| DRAWN BY | LUCY | | TITLE | | PART NO. | | |
| CHECK BY | | | HPCN50M TO HPCN50M | | D06-SC50-SC50-XX | | |
| APPD BY | | | TITLE | | PART NO. | | |

