

NOTES:

1. CABLE: 28AWG X 25PAIRS+AL.MYLAR+DRAIN+BRAID, UL20276 BEIGE (BG-02) PVC JACKET, OD: 9.0mm.

2. CONNECTOR:

P1: CENTRONICS 50PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, BLACK INSULATION, FRONT NICKEL AND REAR TIN PLATED SHELL.

P2: HALF PITCH D-SUB 50PIN MALE: PIN AND IDC TYPE,0.62MM WIRE HOLDER,GOLD FLASH CONTACTS, BLACK INSULATION, NICKEL PLATED SHELL.

3. SHIELDING: P1:COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONTACTOR SHELL & BRAID.

P2:COPPER FOIL TAPE COVER PREMOLD AND SOLDER TO CONTACTOR SHELL & BRAID.

4. ALL HOOD: MOLDED BEIGE (BG-02) PVC.

5. TESTING: 100% ELECTRICAL TESTING.




6. MOLD NO.: CN50-MSM-01; CN50-MSM-N01; COVER-HP50; HPCN50-MSM-01; HPCN50-MSM-N01.

CHART 1


P/N	L	T
D06-SD50-C50-1.5	457	+25/-0
D06-SD50-C50-03	914	+25/-0
D06-SD50-C50-06	1829	+50/-0



TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV A	
DRAWN BY		SHEET	1/2	DWG NO.
		DATE	09/07/06	
CHECK BY		TITLE HPDB50M TO CN50M		
APPD BY		PART NO. D06-SD50-C50-XX		

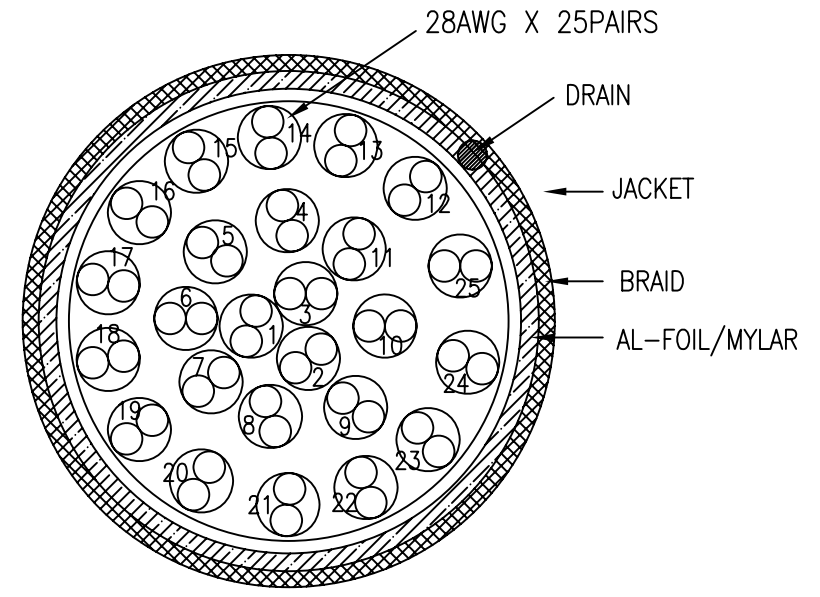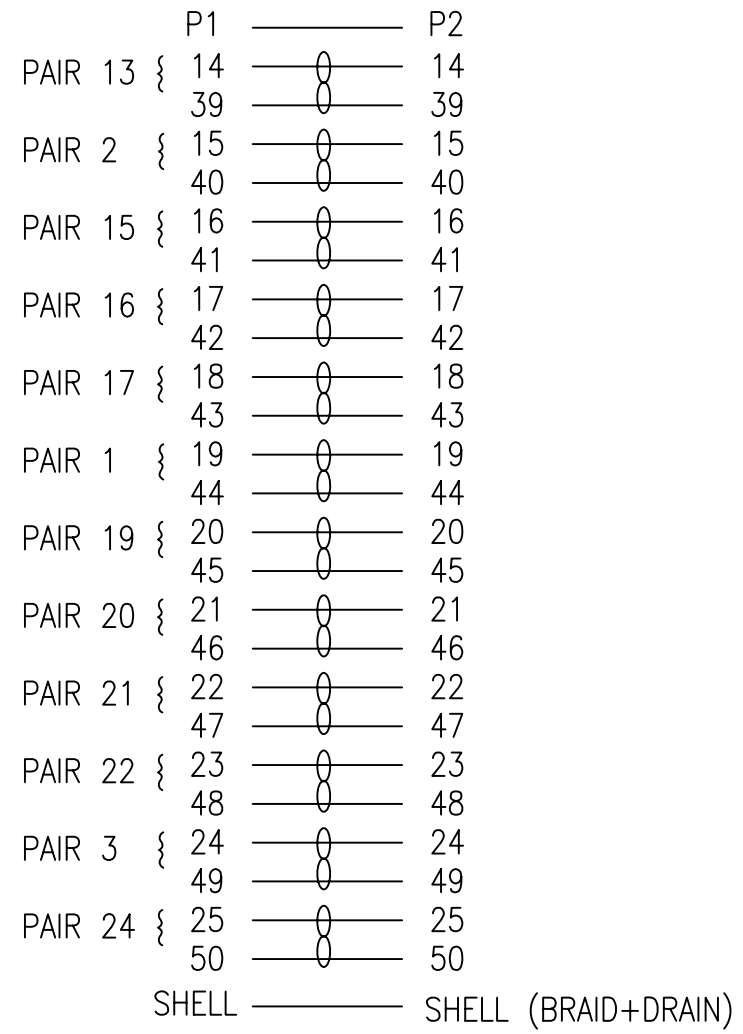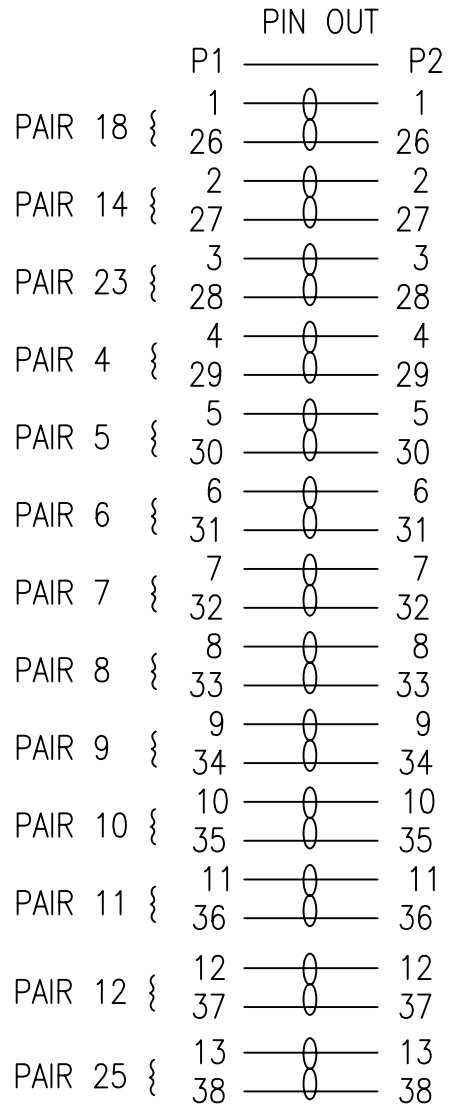

CABLE CONSTRUCTION DRAWING



TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/07/06		
CHECK BY			TITLE HPDB50M TO CN50M			
APPD BY			PART NO. D06-SD50-C50-XX			