


NOTE:

- 1. CABLE: 28AWG X 19PAIRS(CONDUCTOR OD= $\phi 0.62 \pm 0.05$ mm) AL-FOIL AND BRAID(85%) SHIELDED WITH DRAIN WIRE, UL2990 + CUL IA FT1, BEIGE(CTG-401) PVC JACKET,
- 2. CONNECTOR: P1: HALF PITCH D-SUB 50PIN MALE: PIN TYPE, IDC TYPE, GOLD PLATED  $10 \mu$ " CONTACTS. P2: D-SUB 25PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- 3. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 4. THUMB SCREW TO BE MOLDED.
- 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG, BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED, BAR CODE: 39) TO BE STAMPED ON POLYBAG.

SCSI II CABLE  
HPDB50M/DB25M, \*\*FT



D06-SD50-D25-XX


"XX" & "\*\*" SEE CHART 1

CHART 1:

P/N	L	T	**	XX
D06-SD50-D25-03	914	+25 -13	3	03
D06-SD50-D25-06	1829	$\pm 51$	6	06




TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2	DWG NO.	
DRAWN BY			DATE	09/07/06		
CHECK BY			TITLE HPDB50M TO DB25M			
APPD BY			PART NO. D06-SD50-D50-XX			

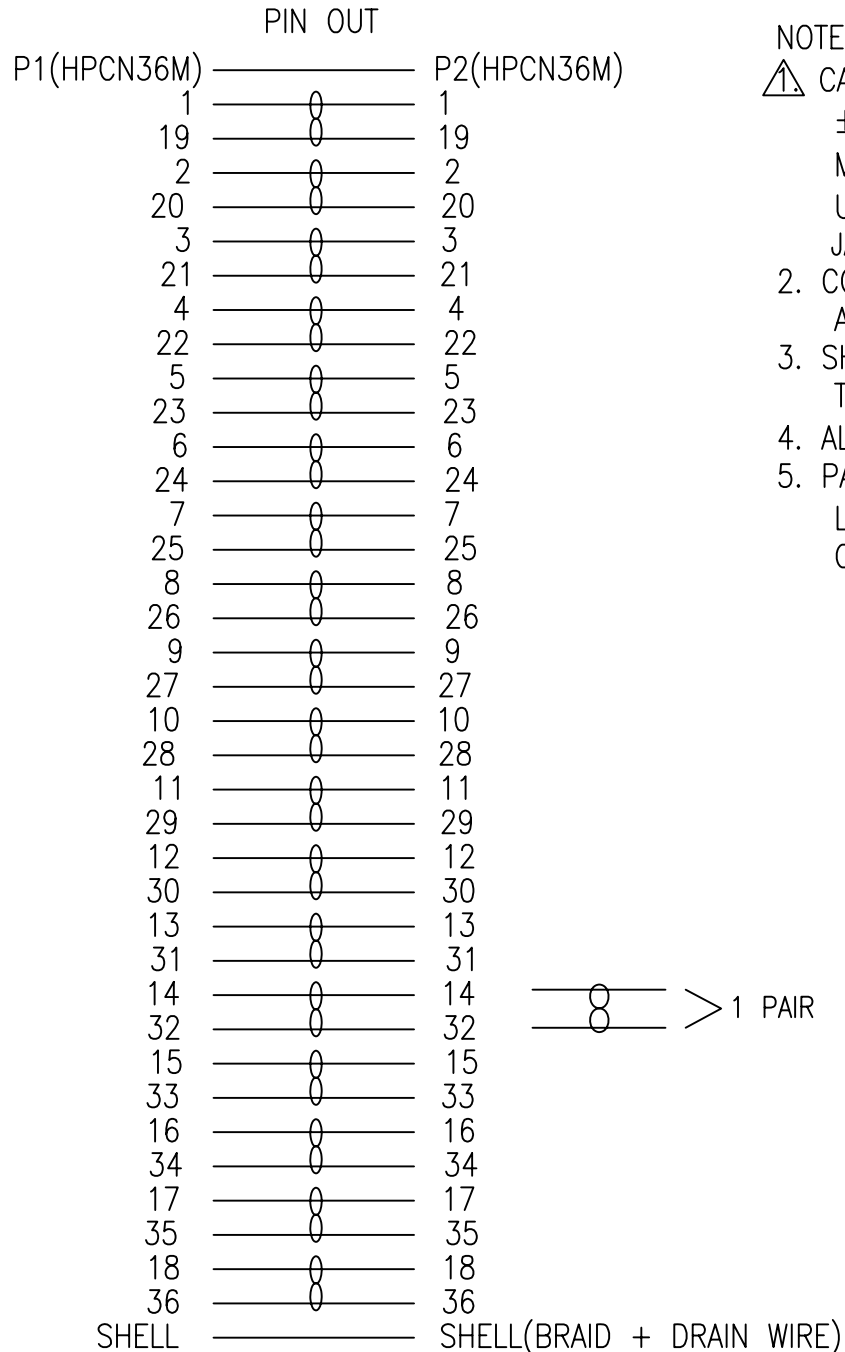

**NOTE:**

1. CABLE: 28AWG X 18PAIRS (INSULATION: P.P, CONDUCTOR OD= $\phi$ 0.62  $\pm$  0.05mm) UNBALANCE=62  $\pm$  6 OHM, 36 TO 44 TURNS PER METER, AL-FOIL AND BRAID(85%) SHIELDED WITH A DRAIN WIRE, UL20276 (IEEE 1284), BEIGE (CTG-401) PVC JACKET, MARKING ON PVC JACKET INCLUDE "IEEE 1284-1994 COMPLIANT" ALONG ITS LENGTH.
2. CONNECTOR: P1 & P2: HALF PITCH 36PIN CENTRONICS MALE: RIBBON AND IDC TYPE, GOLD PLATED 10 $\mu$ " CONTACTS.
3. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
4. ALL HOOD: MOLDED BEIGE (CTG-401) PVC.
5. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG. LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG TO READ:

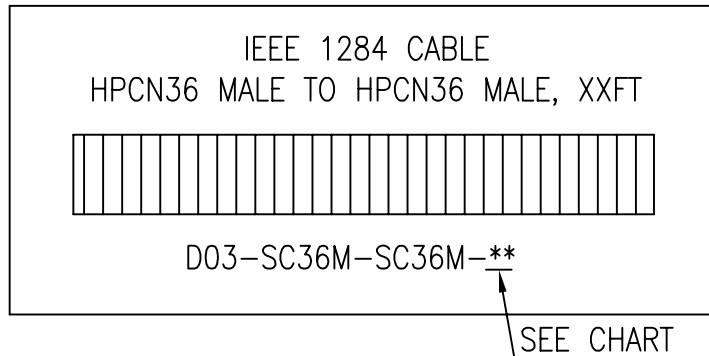

TOLERANCE			Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
INCHES	M/M					
.X	.015	.30	SCALE	NONE		REV   A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	2/2	DWG NO.	
DRAWN BY			DATE	09/07/06		
CHECK BY			TITLE HPDB50M TO DB25M			
APPD BY			PART NO. D06-SD50-D50-XX			

