


NOTE:

- 1. CABLE: 28AWG X 25PAIRS(CONDUCTOR OD= ϕ 0.62 \pm 0.05mm) AL-FOIL AND BRAID(85%) SHIELDED WITH DRAIN WIRE, UL2990 + CUL IA FT1, BEIGE(CTG-401) PVC JACKET,
- 2. CONNECTOR: P1 & P2: HALF PITCH D-SUB 50PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10 μ " CONTACTS.
- 3. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 4. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 5. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG, BAR CODE LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.

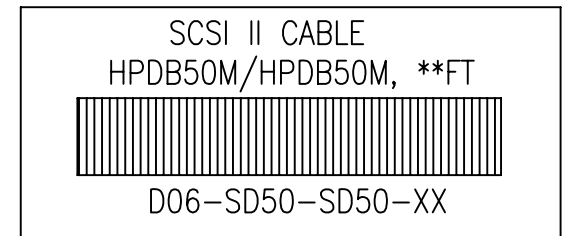





"XX" & "**" SEE CHART 1

CHART 1

P/N	L	T	**	XX
D06-SD50-SD50-1.5	457	$\begin{matrix} +25 \\ -13 \end{matrix}$	1.5	1.5
D06-SD50-SD50-03	914	± 25	3	03
D06-SD50-SD50-06	1829	± 51	6	06
D06-SD50-SD50-10	3048	± 51	10	10



TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc.	
.X	.015					http://www.trinetusa.com	
.XX	.010			SCALE	NONE	 REV A	
.XXX	.005			UNIT	MM		
DRAWN BY				SHEET	1/2	DWG NO.	
				DATE	09/07/06		
CHECK BY				TITLE			
				HPDB50M/M			
APPD BY				PART NO.			
				D06-SD50-SD50-XX			

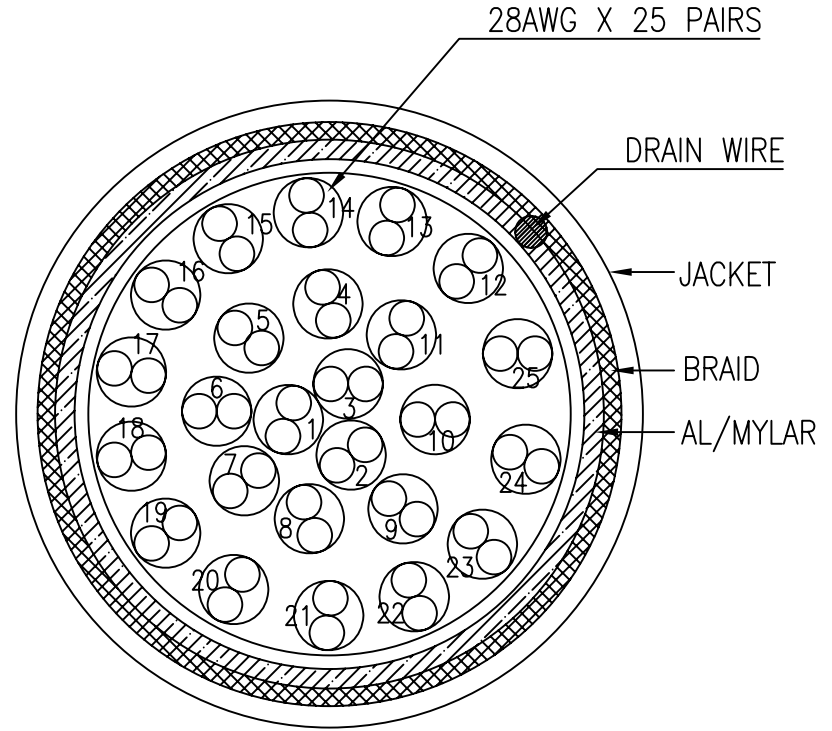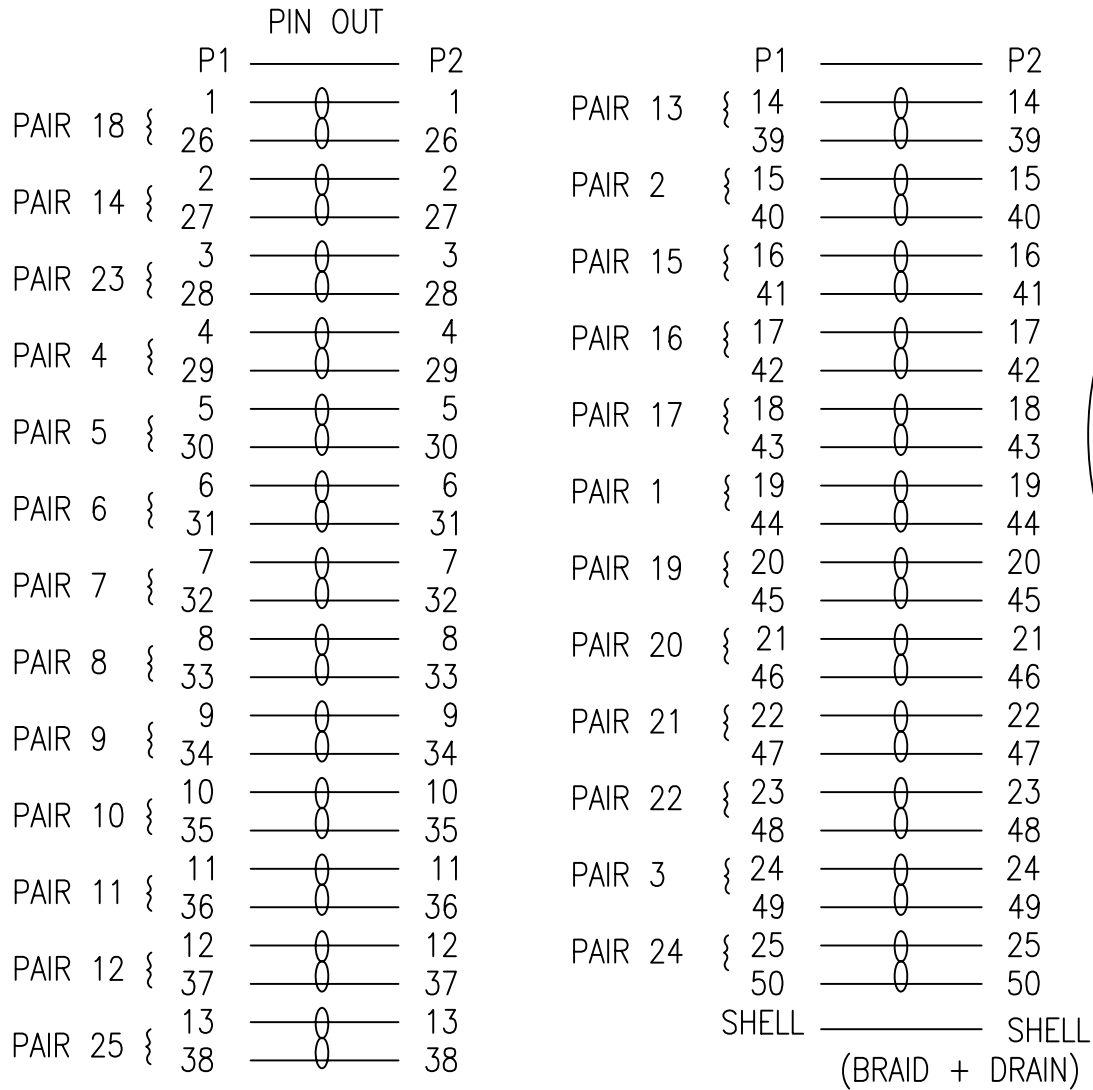

TOLERANCE			TNT Tri-Net Technology, Inc. http://www.trinetusa.com				
INCHES		M/M					
.X	.015	.30	SCALE	NONE		REV	A
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	2/2	DWG NO.		
DRAWN BY			DATE	09/07/06			
CHECK BY			TITLE HPDB50M/M				
APPD BY			PART NO. D06-SD50-SD50-XX				

