


NOTE:

- 1. CABLE: 28AWG X 25PAIRS(CONDUCTOR OD=0.62±0.05mm) AL-FOIL AND BRAID(85%) SHIELDED WITH DRAIN WIRE, UL2990 + CUL IA FT1, BEIGE(CTG-401) PVC JACKET,
- 2. CONNECTOR: P1: HALF PITCH D-SUB 68PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ" CONTACTS. P2: CENTRONICS 50PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
- 3. METAL SCREW.
- 4. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 5. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
- 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG, BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED) TO BE STAMPED ON POLYBAG.

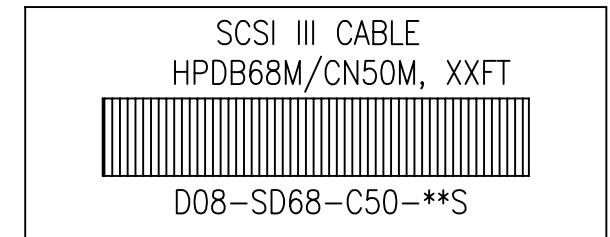





"XX" & "\*\*" SEE CHART 1

CHART 1:

P/N	L	T	**	XX
D08-SD68-C50-03S	914	±25	3	03
D08-SD68-C50-06S	1829	±51	6	06
D08-SD68-C50-10S	3048	±51	10	10



TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com					
.X	.015	.30				SCALE	NONE	⊕	REV	A	
.XX	.010	.10			UNIT	MM					
.XXX	.005	.05				SHEET	1/2	DWG NO.			
DRAWN BY		DATE		06/04/05		TITLE					
CHECK BY		HPDB68M TO CN50M					PART NO.				
APPD BY		D08-SD68-C50-XX-S									

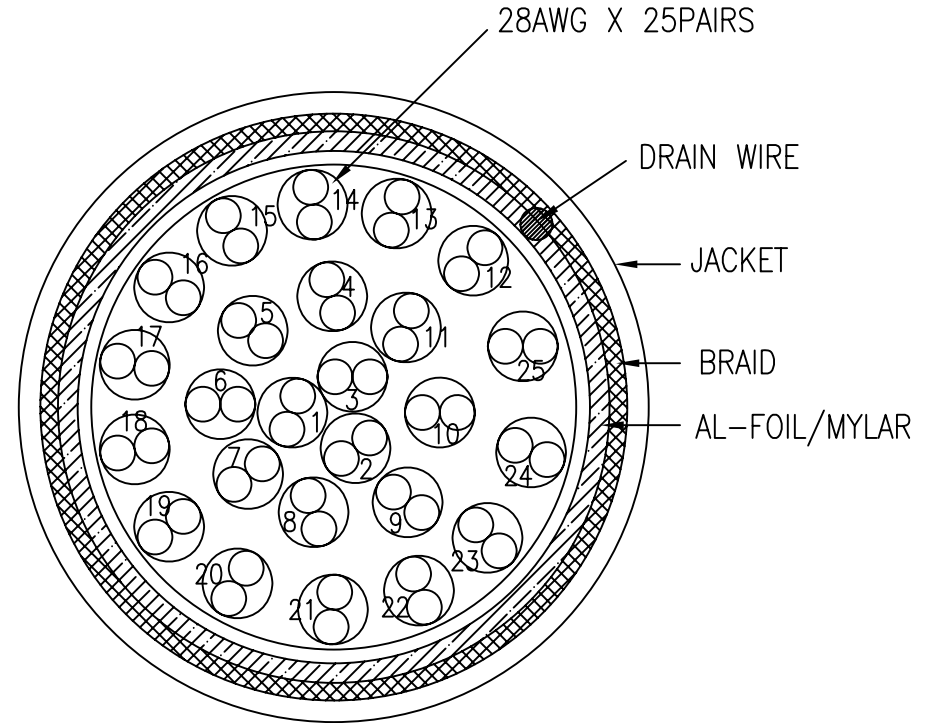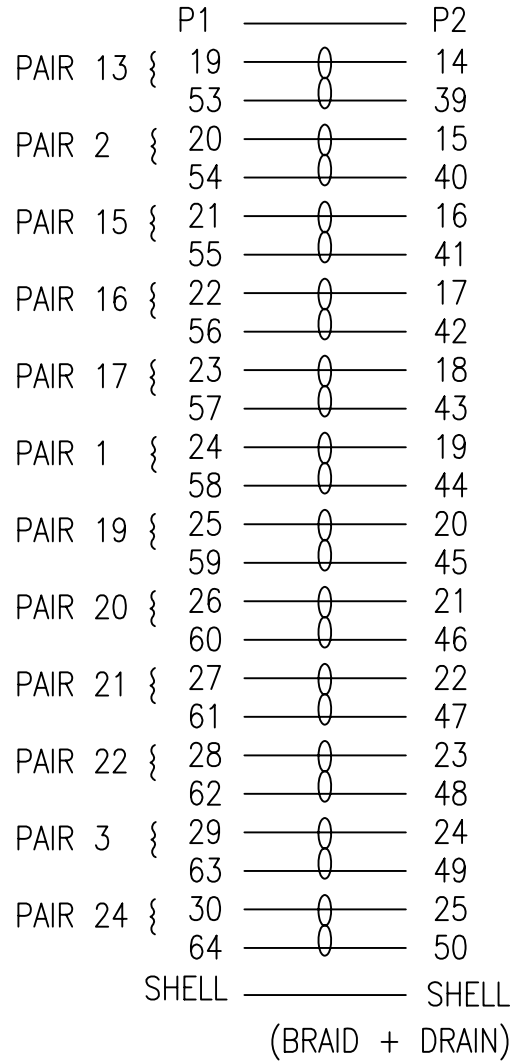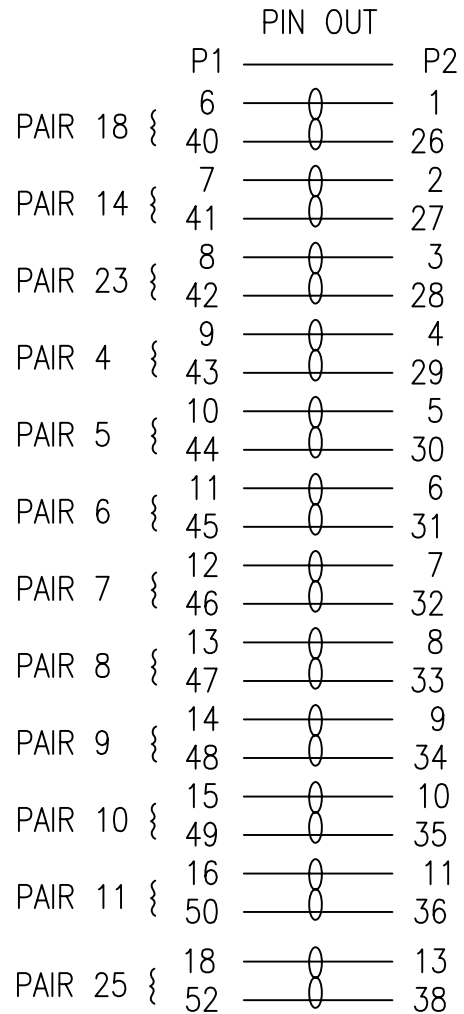

CABLE CONSTRUCTION DRAWING

TOLERANCE			Tri-Net Technology, Inc.	
	INCHES	M/M	<a href="http://www.trinetusa.com">http://www.trinetusa.com</a>	
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV   A	
DRAWN BY				
CHECK BY			DATE	06/04/05
APPD BY			DWG NO.	
			TITLE	
			HPDB68M TO CN50M	
			PART NO.	
			D08-SD68-C50-XX-S	

