

NOTE:

- 1. CABLE: 28AWG X 25PAIRS(CONDUCTOR OD=0.62±0.05mm) AL-FOIL AND BRAID(85%) SHIELDED WITH DRAIN WIRE, UL2990 + CUL IA FT1, BEIGE(TNT-BG-02) PVC JACKET,
- 2. CONNECTOR: P1: HALF PITCH D-SUB 68PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ" CONTACTS.
P2: HALF PITCH D-SUB 50PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ" CONTACTS.
- 3. METAL SCREW.
- 4. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
- 5. ALL HOOD: MOLDED BEIGE(TNT-BG-02) PVC.
- 6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG, BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED) TO BE STAMPED ON POLYBAG.



CHART 1:

P/N	L	T	XX	**
D08-SD68-SD50-03-S	914	±25	3	03
D08-SD68-SD50-06-S	1829	±51	6	06



SCSI III CABLE
 HPDB68M/HPDB50M, xxFT
 D08-SD68-SD50-**-S
 <DATE> MADE IN CHINA




TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2	DWG NO.	
DRAWN BY			DATE	06/04/05		
CHECK BY			TITLE HPDB68M TO HPDB50M			
APPD BY			PART NO. D08-SD68-SD50-XX-S			

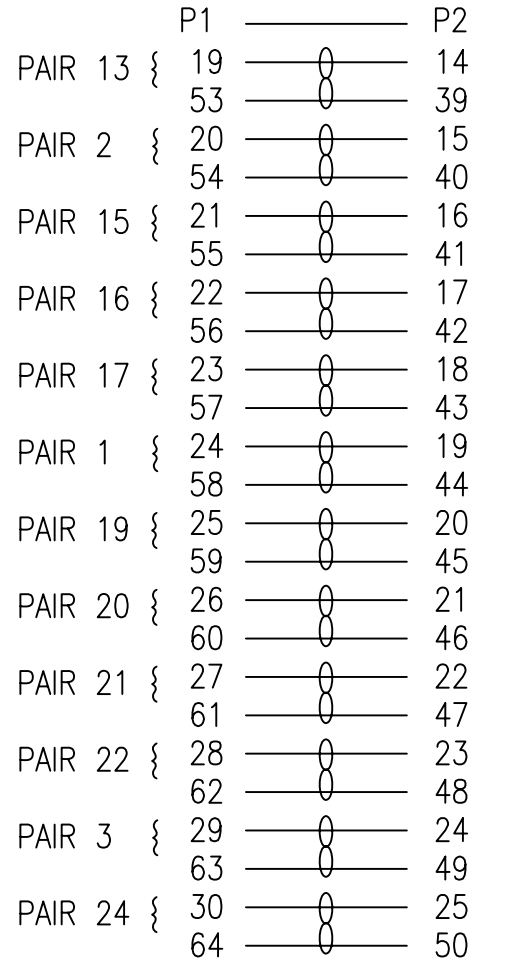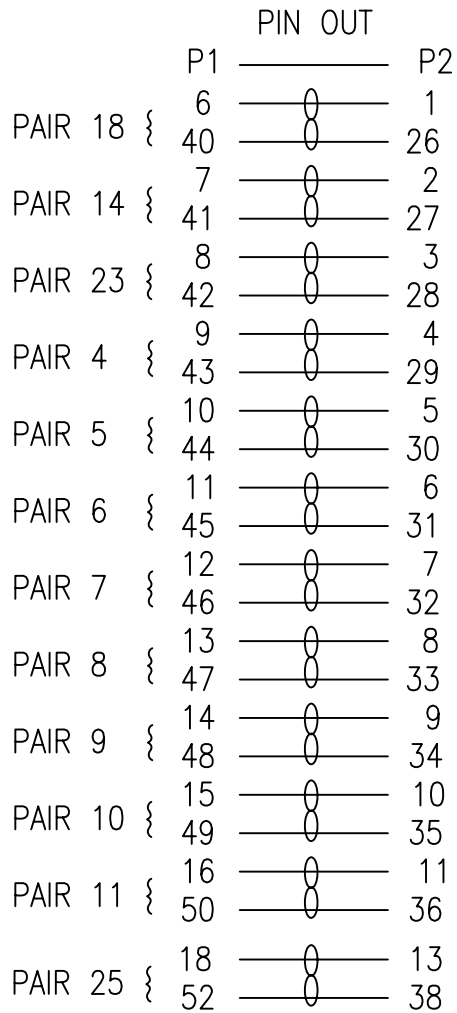

SHELL ————— SHELL
(BRAID + DRAIN)

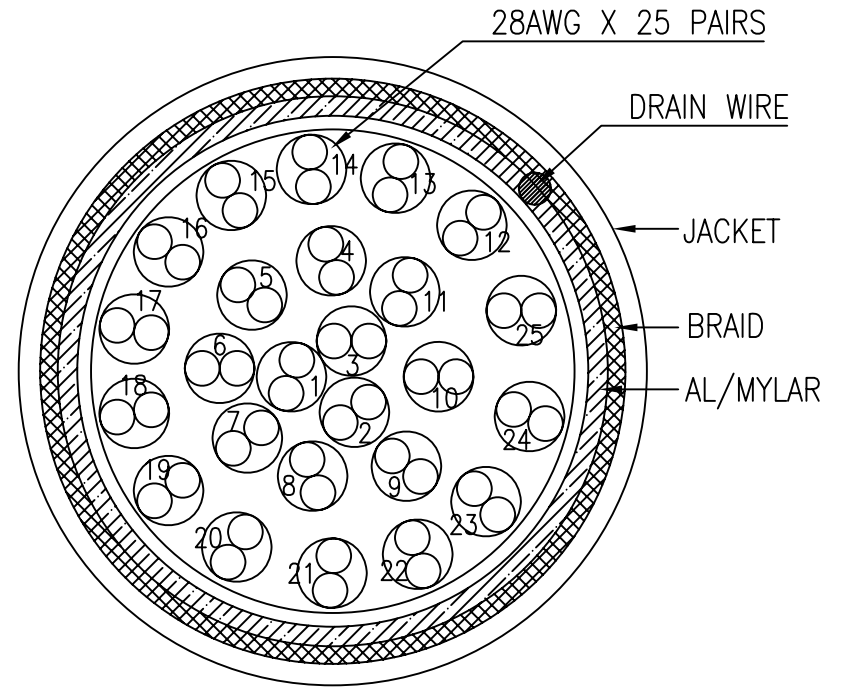

CABLE CONSTRUCTION DRAWING



TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	2/2
DRAWN BY			DATE	06/04/05
CHECK BY			TITLE	
APPD BY			HPDB68M TO HPDB50M	
			PART NO. D08-SD68-SD50-XX-S	