

NOTE:

1. CABLE: 28AWG X 25PAIRS (CONDUCTOR OD= $\varnothing 0.62 \pm 0.05\text{mm}$), AL-FOIL AND BRAID (85%min) SHIELDED WITH DRAIN WIRE, UL2990 + CSA I A FT1, BEIGE (TNT-BG-02) PVC JACKET.
2. CONNECTOR: P1: HALF PITCH D-SUB 68PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ " CONTACTS, BLACK PBT INSULATION.
P2: HALF PITCH D-SUB 50PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ " CONTACTS, BLACK PBT INSULATION.
3. SHIELDING: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
4. ALL HOOD: MOLDED BEIGE (TNT-BG-02) PVC.
5. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG.
BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED) TO BE STAMPED ON POLYBAG.

SCSI III CABLE
 HPDB68M TO HPDB50M, *FT
 D08-SD68-SD50-0*
 <DATE> MADE IN CHINA




"*" SEE P/N CHART

CHART


D08-SD68-SD50-03	3	914	+25/-13
D08-SD68-SD50-06	6	1829	+152/-51
P/N	*	L	T



TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV A	
DRAWN BY				
CHECK BY			DATE	06/04/05
APPD BY			TITLE SCSI III CABLE HPDB68M TO HPDB50M PART NO. D08-SD68-SD50-XX	

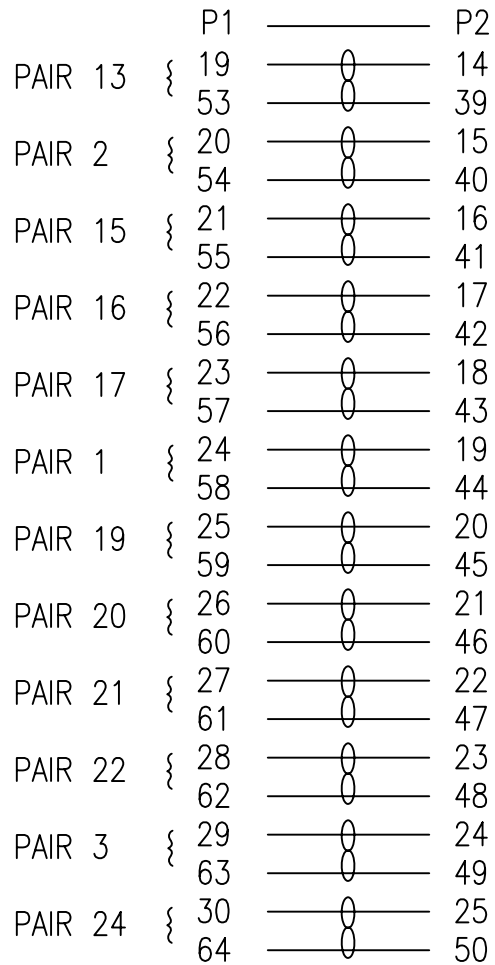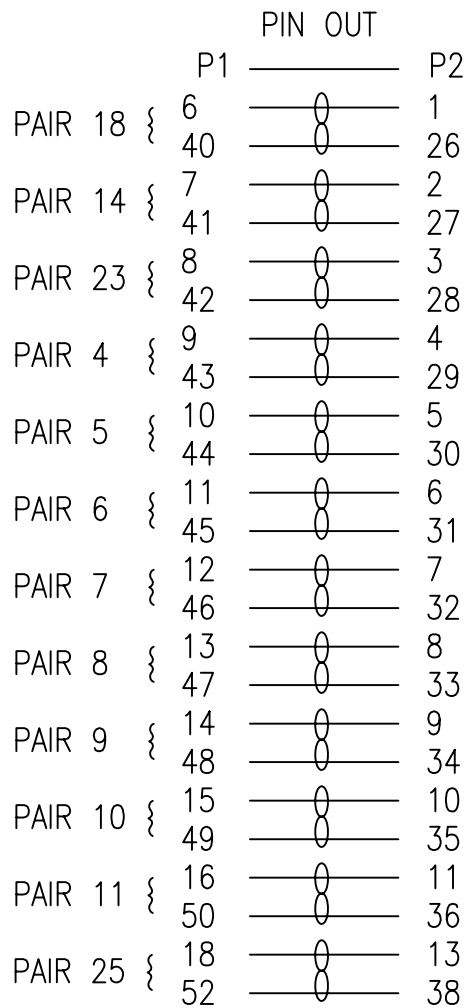

SHELL ————— SHELL
(BRAID + DRAIN)

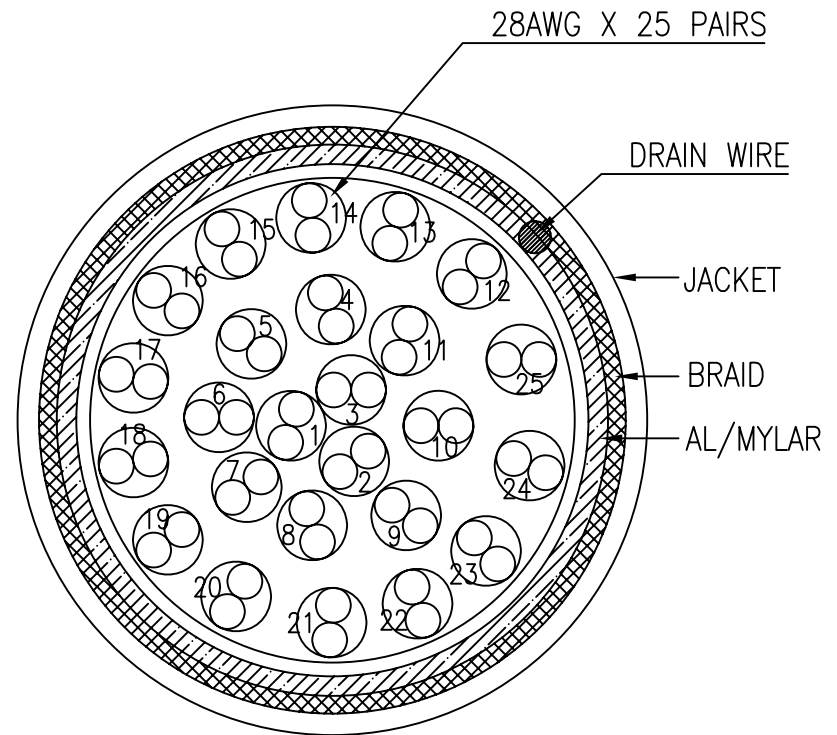

CABLE CONSTRUCTION DRAWING

TOLERANCE			Tri-Net Technology, Inc.	
	INCHES	M/M	http://www.trinetusa.com	
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	2/2
			DATE	06/04/05
DRAWN BY			DWG NO.	
CHECK BY			TITLE	
APPD BY			SCSI III CABLE HPDB68M TO HPDB50M	
			PART NO.	
			D08-SD68-SD50-XX	

