


NOTE:

1. CABLE: 28AWG X 34PAIRS (CONDUCTOR OD= $\varnothing 0.62 \pm 0.05 \text{mm}$), AL-FOIL AND BRAID (85%min) SHIELDED WITH DRAIN WIRE, UL2990, BEIGE (CTG-401) PVC JACKET.
2. CONNECTOR: P1 & P2: HALF PITCH D-SUB 68PIN MALE: PIN AND IDC TYPE, GOLD PLATED 10μ " CONTACTS, BLACK PBT INSULATION.
3. SHIELDING: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID.
4. ALL HOOD: MOLDED BEIGE (CTG-401) PVC.
5. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
6. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG.

BAR CODE LABEL (WHITE BACKGROUND WITH BLACK PRINTED) TO BE STAMPED ON POLYBAG.

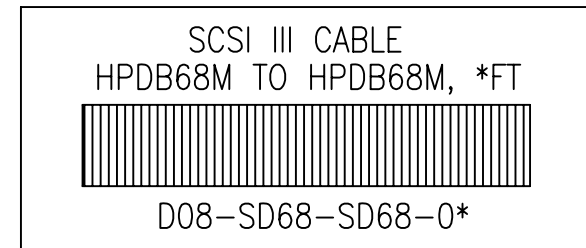


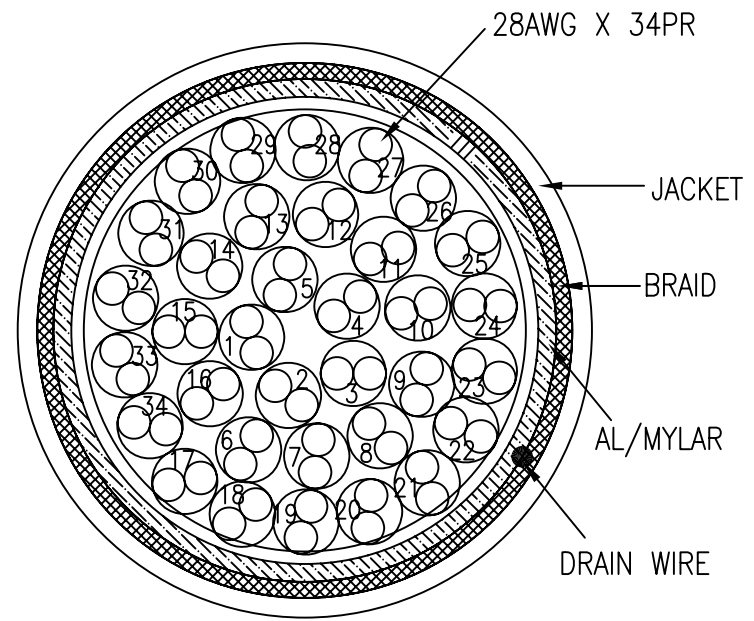
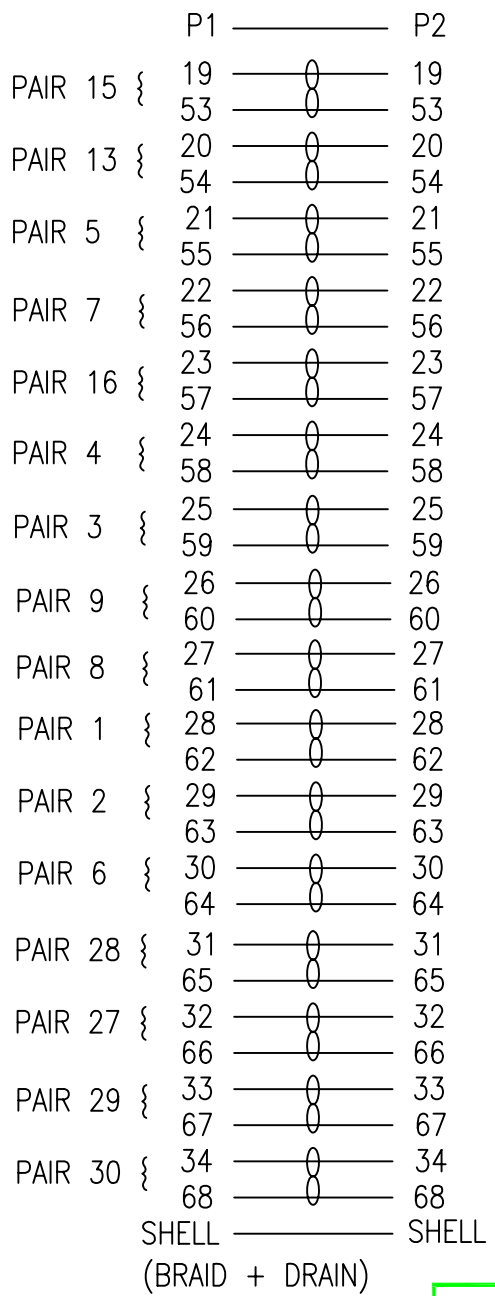
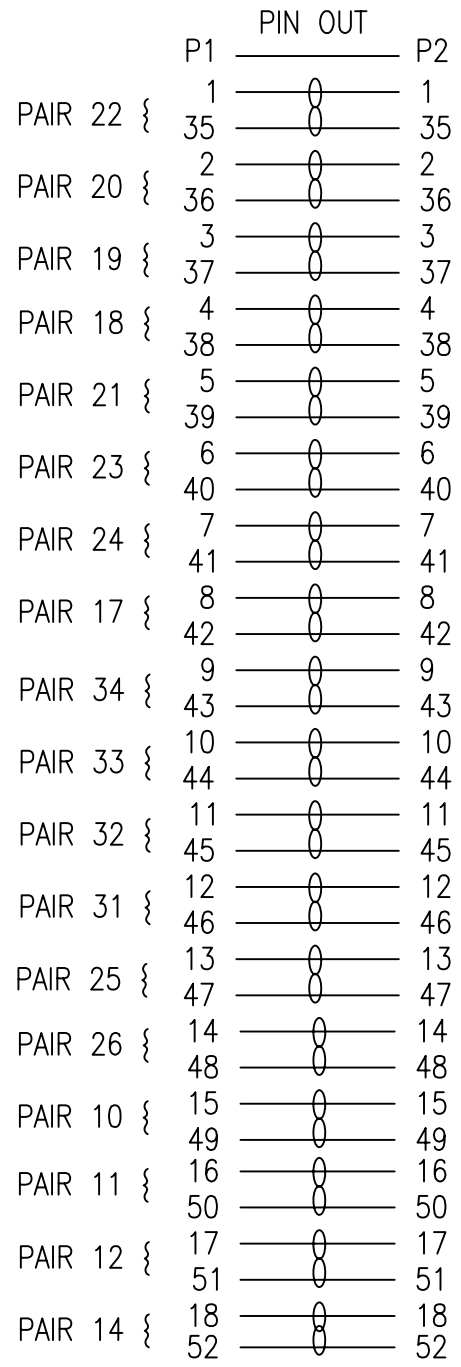
"*" SEE P/N CHART

CHART


D08-SD68-SD68-03	3	914	+25/-13
D08-SD68-SD68-06	6	1829	+152/-51
P/N	*	L	T



TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	 http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	1/2
DRAWN BY			DATE	06/04/05
CHECK BY			TITLE	
APPD BY			PART NO.	



CABLE CONSTRUCTION DRAWING



TOLERANCE			Tri-Net Technology, Inc.				
INCHES M/M			http://www.trinetusa.com				
.X	.015	.30	SCALE	NONE	⊕	REV	A
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	SHEET	2/2	DWG NO.		
DRAWN BY			DATE	06/04/05	TITLE		
CHECK BY			HPDB68M TO HPDB68M				
APPD BY			PART NO. D08-SD68-SD68-XX				

