


Note:

1. All of the Pin 1 of Connectors Match the Red Stripe.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		05/21/03	

USE TPE 7.25" CABLE

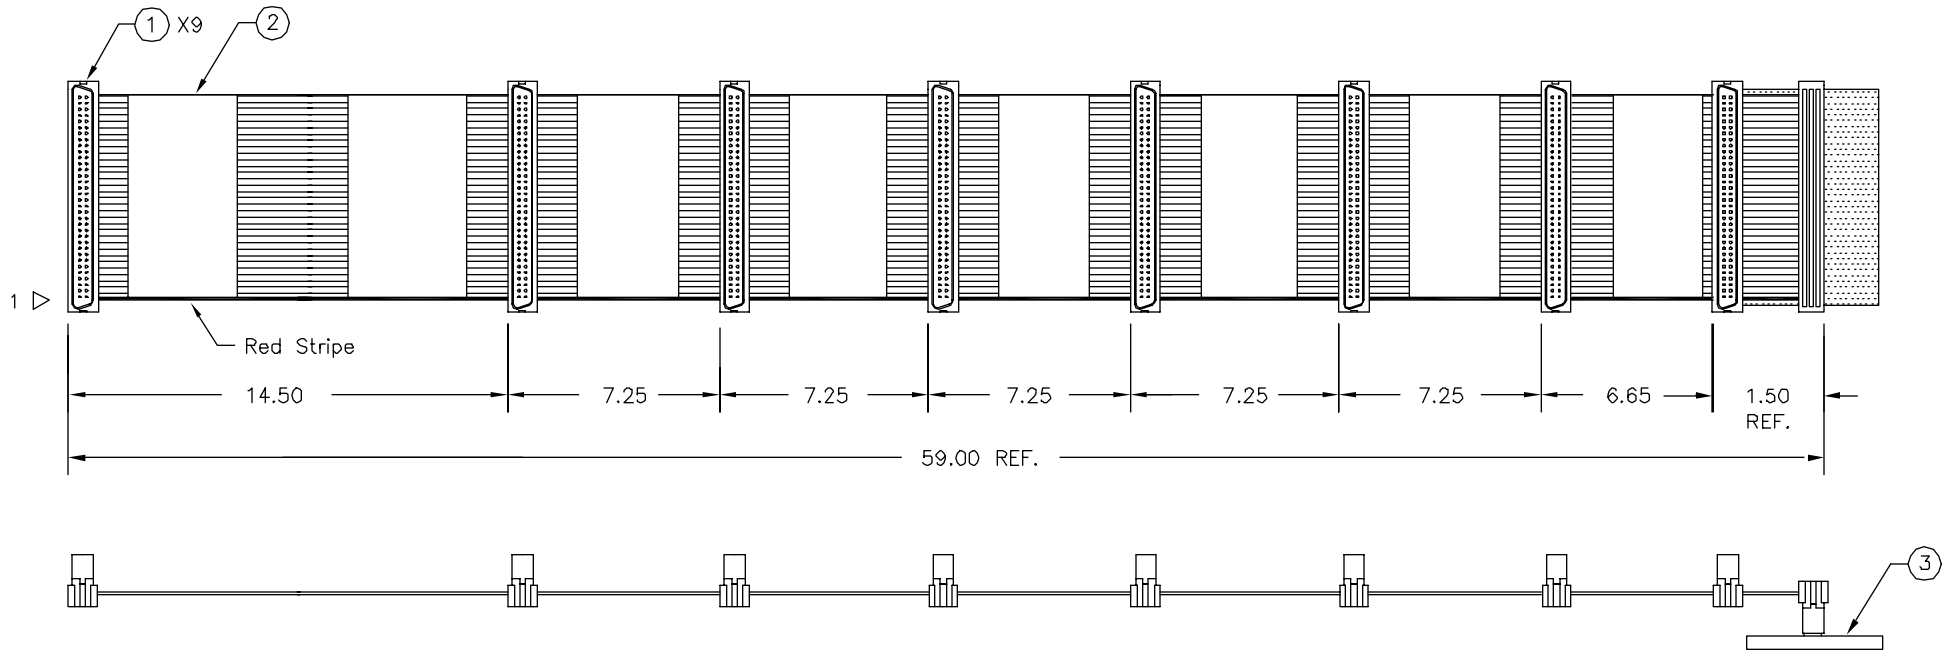

APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

3	Ultra-3 320 Terminator, Plug-In Type		
2	68-Cond. 0.025" Twisted Flat 30 AWG TPE Laminated Cable AMPHENOL P/N: 125-3096-890		
1	STARCONN 68 Pin Male Connector		
UNLESS OTHERWISE SPECIFIED TOLERANCE: .XX ± 0.30		68P Male X8 w/ Ultra-3 320 Terminator, 59"	
CUSTOMER TRI-NET		<b>TRI-NET</b>	
DRAWN BY BOBBY	SIZE A	DWG NO. D18-ULTRA320-7	REV A
UNIT INCH	www.trinetusa.com		SHEET 1 of 1