



NOTES

- C1 : 4.7  $\mu$ F  $\pm$ 20% Tantalum 16V
- C2 : 22  $\mu$ F  $\pm$ 20% Tantalum 16V
- C3 : 0.1  $\mu$ F  $\pm$ 20% Ceramic 16V
- R1 : 110  $\Omega$ , 0.125 Watt, 27 Plc
- U1 : 2.85V
- NC : 19, 53
- INSULATION RESISTANCE:  
10M  $\Omega$

1. HALF PITCH D-SUB 68 MALE, ALL PLASTIC
2. HALF PITCH D-SUB 68 FEMALE, ALL PLASTIC
3. OVERMOLD

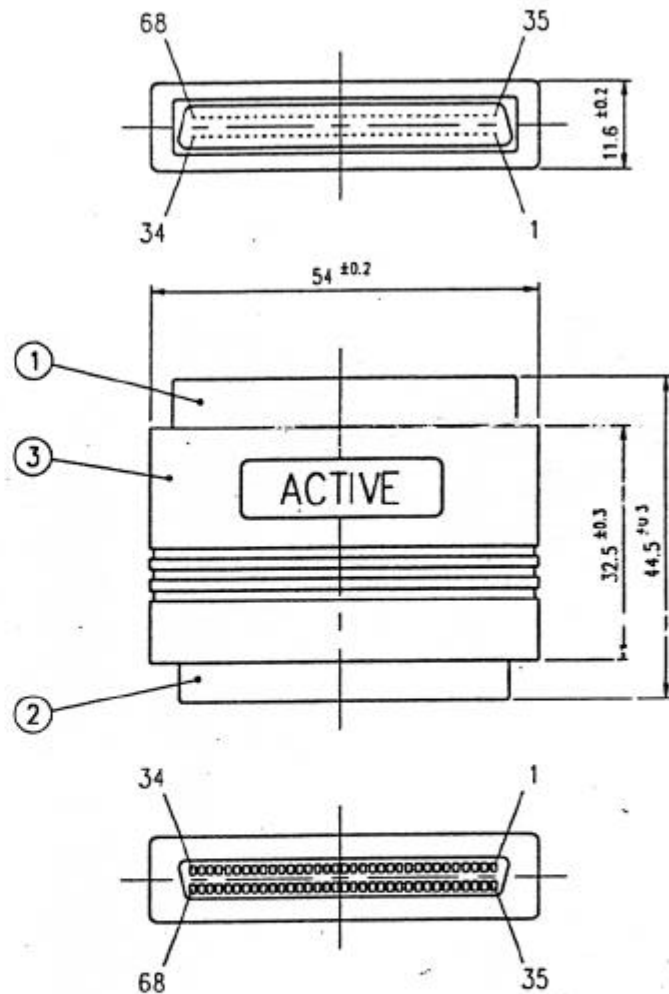

日期: DATE	87.06.01	繪圖 DRAWN	CHOUZ	PART NO: D05-ID68MF-A	 Tri-Net Technology, Inc./U.S.A.	圖號 DRAWING NO
版次: REV.	1	比例 SCALE	1:1			TER-0005
單位: UNIT	mm	核准 APPROVAL				