

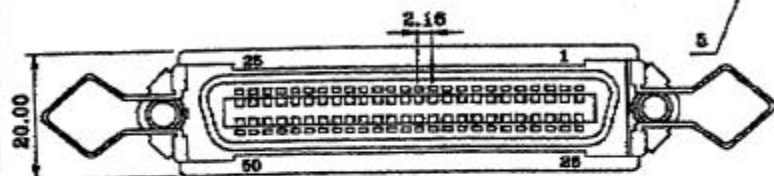
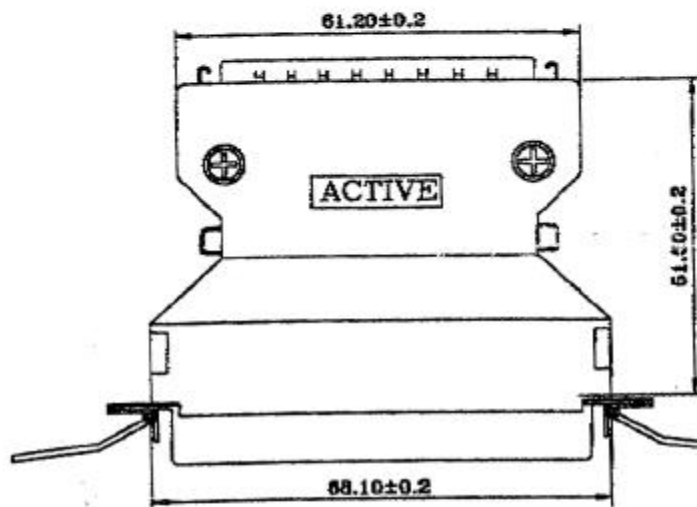
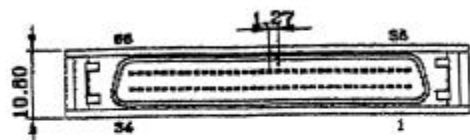


MDS68M

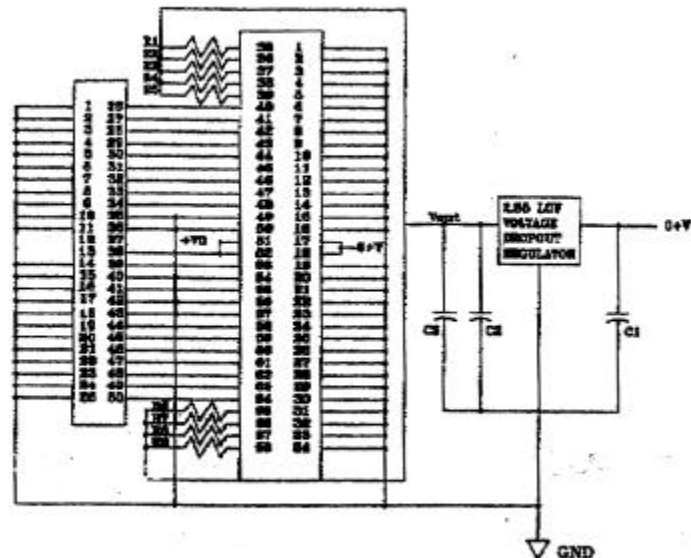

RCS50F

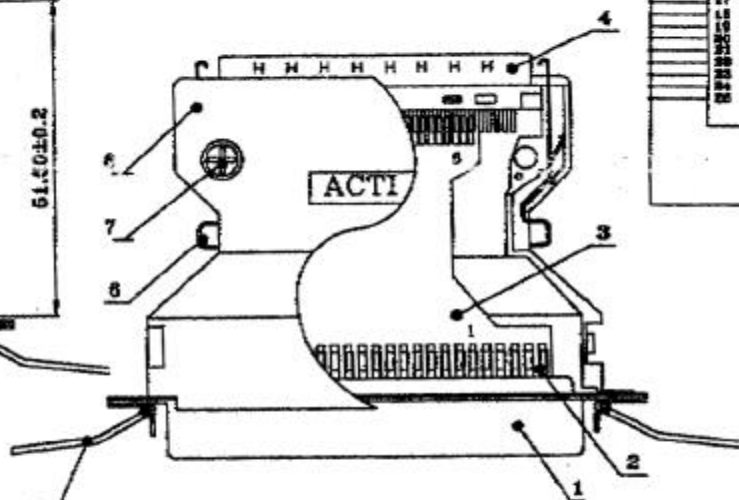

R1 - R9=110W ±2K
 C1=4.7uF/16V ±20% TAN.CAP
 C2=22uF/16V ±20% TAN.CAP
 C3=0.1uF/50V ±20% CERL.CAP
 REG Output=2.85V ± 1%

PART NUMBER	DESCRIPTION	Q'TY
1	RCS50F Centronic 50P Female Connector	1
2	Termination End Soldered	2
3	P.C.B FR/4	1
4	MDS68M Half Pitch D-SUB 68P Male Connector	1
5	Bail Bail Lock	2
6	Latch Spring Latch	2
7	Flat Screw SR2.5x6.5A	2
8	Hood ABS Metallized	1

日期: DATE	88.01.01	繪圖 DRAWN	CHOUZ
版次: REV.	1	比例 SCALE	1:1
單位: UNIT	mm	核准 APPROVAL	

PART NO :
D05-SD68M-CN50F-A



Tri-Net Technology, Inc./U.S.A.

圖號
DRAWING NO

TER-0030