


NOTES:

- * C1=4.7 uF ±20% Tantalum
- * C2=22 uF ±20% Tantalum
- * C3=0.1 uF ±20% Ceramic
- * R1-R27=110 OHM ±1%
- * R28=0.1 WATT 113 OHM ±1%
- * R28=0.1 WATT 143 OHM ±1%
- * U1=HELIOS TECH.HE-8702A
(OR ENGINEERING APPROVED
EQUVALENT)

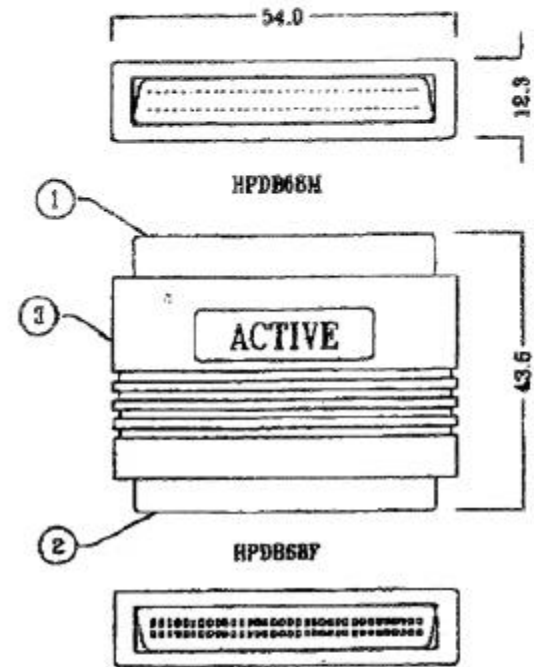

PART	QTY	DESCRIPTION			
1	1	HPDB68 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR			
2	1	HPDB68 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR			
3		MOLDED PVC BLACK			
CUSTOMER		Tri-Net Technology / U.S.A.			
CHECKED	<i>hsh</i>				
DRAWING	胡 國	DATE	11.11.98	PART NUMBER	D05-SD68MF-A