



| P/N | FT | L(mm) | T(mm) |
|----------|----|-------|----------|
| U022-003 | 03 | 914 | +30/-30 |
| U022-006 | 06 | 1829 | +50/-50 |
| U022-010 | 10 | 3048 | +50/-50 |
| U022-015 | 15 | 4572 | +100/-50 |



NOTES:

- △ CABLE: UL2725 USB 2.0 CABLE.(28AWG*1PAIR + 24AWG X 2C), AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE(28AWG), BLACK PVC JACKET, OD:4.8±0.10mm..
- 2. CONNECTOR: P1 : USB A TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
P2 : USB B TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
- 3. HOOD: MOLDED BLACK PVC.
- 4.ELECTRICAL PROPERTIES:
 - (1).IT SHALL HAVE NOT ANY OPEN/SHORT,MISWIRING AND INTERMITTENT.
 - (2).THE CABLE SHALL BE 100% ELECTRICAL TEST.
 - (3).INSULATION RESISTANCE:2M OHM MIN.
 - (4).CONDUCTANCE RESISTANCE:5 OHM MAX.
 - (5).HI-POT TEST:DC 300V MIN.

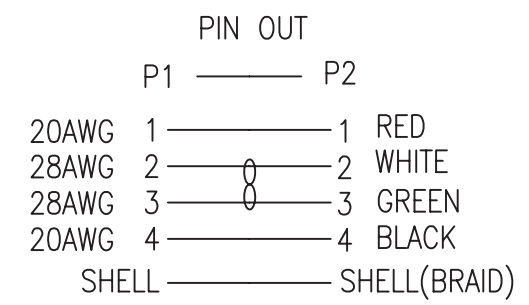

| TOLERANCE | | M/M | | Tri-Net Technology, Inc. | | | | |
|-----------|------|-----|--|---|----------|---------|-----|---|
| INCHES | | | | http://www.trinetusa.com | | | | |
| .X | .015 | .30 | | SCALE | NONE | | REV | A |
| .XX | .010 | .10 | | UNIT | MM | | | |
| .XXX | .005 | .05 | | SHEET | 1/1 | DWG NO. | | |
| DRAWN BY | | | | DATE | 08/05/05 | TITLE | | |
| CHECK BY | | | | USB A/M TO USB B/M 2.0 | | | | |
| APPD BY | | | | PART NO. U022-XXX | | | | |