


CUSTOMER:TNT-USA

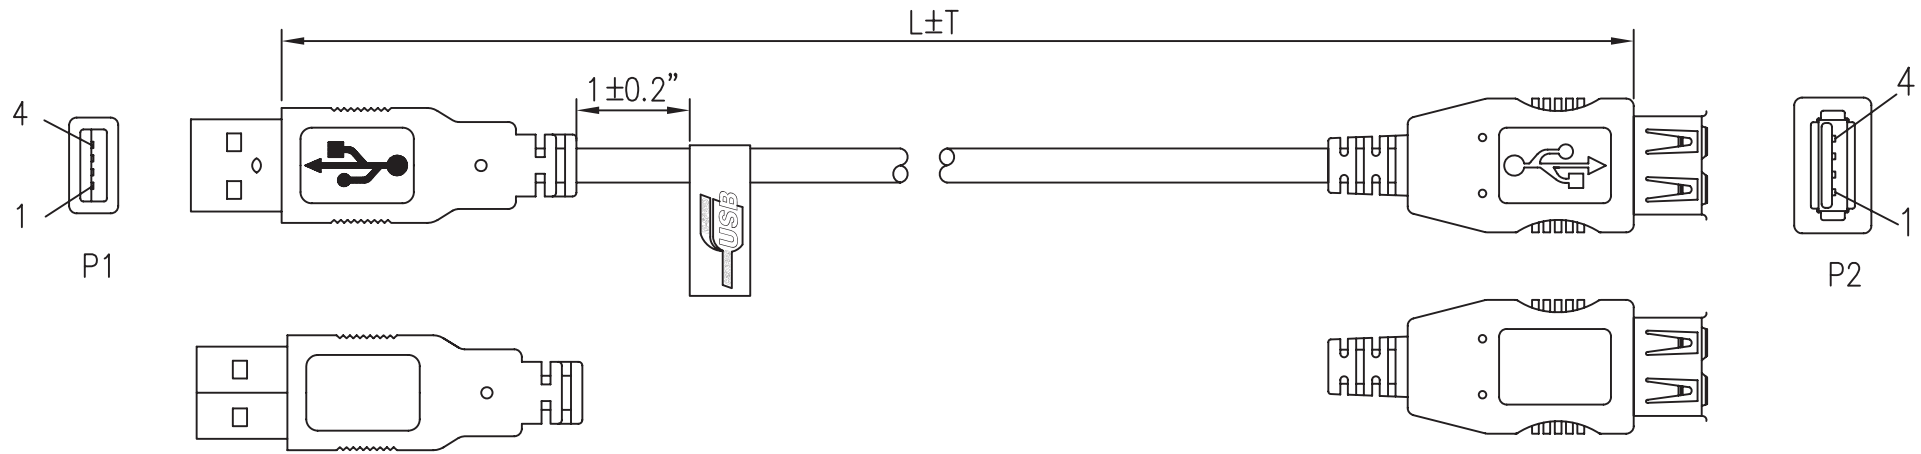


APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

L	T
L ≤ 3FT	+1/-0 INCH
3FT < L ≤ 6FT	+2/-0 INCH
6FT < L ≤ 15FT	+3/-0 INCH
15FT < L ≤ 30FT	+4/-0 INCH
L > 30FT	+6/-0 INCH

PIN OUT

	P1		P2	
24AWG	1	—————	1	RED
28AWG	2	—————	2	WHITE
28AWG	3	—————	3	GREEN
24AWG	4	—————	4	BLACK
	SHELL	—————	SHELL	(BRAID)



NOTES:

- CABLE: UL2725 USB 2.0 REV CABLE.(28AWG*1PAIR + 24AWG X 2C), AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE(24AWG), BLACK(TNT-BK) PVC JACKET, OD:4.8±0.1mm.
- CONNECTOR: P1: USB A TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL. P2: USB A TYPE FEMALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- HOOD: MOLDED 45P PVC BLACK(TNT-BK) PVC.
- MOLDED NO:P1.TNT-USB-AM01,P2.TNT-USB-AF01.
- PACKING:EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
- 100% ELECTRICAL TESTING.



TOLERANCE		TNT Tri-Net Technology, Inc.			
INCHES	M/M	http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV A
.XX	.010	.10	UNIT	MM	
.XXX	.005	.05	SHEET	1/1	
DRAWN BY	<i>Meteor</i>		DATE	11/30/05	DWG NO.
CHECK BY	TITLE USB AM TO USB AF				
APPD BY	PART NO. U08-AM-AF-XX				