



CUSTOMER:TNT-USA

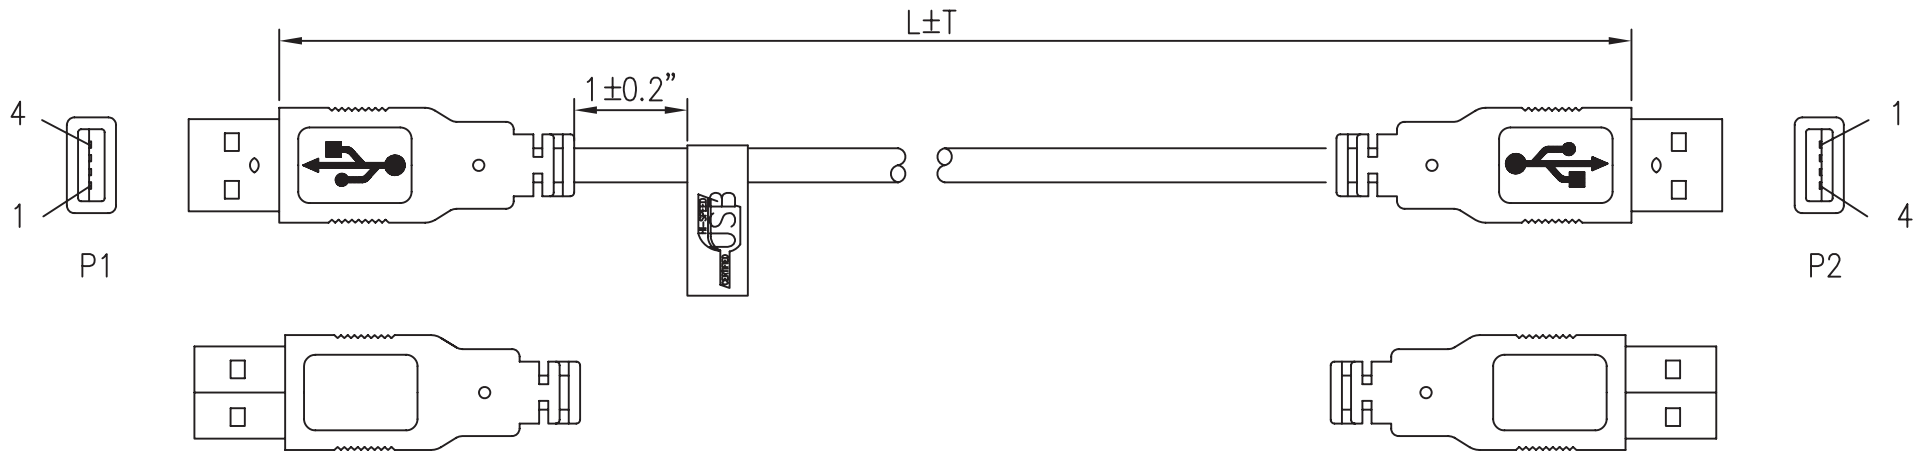

L	T
L ≤ 3FT	+1/-0 INCH
3FT < L ≤ 6FT	+2/-0 INCH
6FT < L ≤ 15FT	+3/-0 INCH
15FT < L ≤ 30FT	+4/-0 INCH
L > 30FT	+6/-0 INCH

PIN OUT

	P1		P2	
24AWG	1	—————	1	RED
28AWG	2	—————	2	WHITE
28AWG	3	⊗	3	GREEN
24AWG	4	—————	4	BLACK
	SHELL	—————	SHELL(BRAID)	



NOTES:

- CABLE: UL2725 USB 2.0 REV CABLE.(28AWG*1PAIR + 24AWG X 2C), AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE(24AWG), BLACK(TNT-BK) PVC JACKET, OD:4.8±0.1mm.
- CONNECTOR: USB A TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- HOOD: MOLDED 45P PVC BLACK(TNT-BK) PVC. MOLDED NO:TNT-USB-AM01.
- PACKING:EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG.
- 100% ELECTRICAL TESTING.



TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com				
.X	.015			.30		SCALE	NONE	⊕	REV	A
.XX	.010			.10		UNIT	MM			
.XXX	.005			.05		SHEET	1/1			
DRAWN BY	Meteor					DATE	11/30/05			
CHECK BY						TITLE USB AM TO USB AM				
APPD BY						PART NO. U08-AM-AM-XX				