


P1 USB A/F

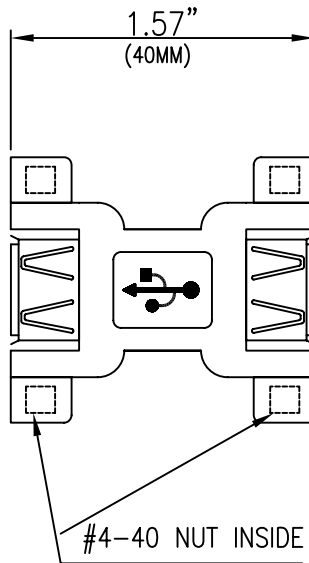

P2 USB A/F

PIN OUT

A Female		A Female
1	_____	1
2	_____	2
3	_____	3
4	_____	4
G	_____	G

NOTE:
 WIRE: UL1061 26AWG 18mm.
 CONN.: P1&P2: USB A TYPE FEMALE,CONTACT MATERIAL:BRASS,GOLD PLATED
 OVER,SHELL NICKEL PLATED.
 ALL HOOD: MOLD PVC: 25P BEIGE(TNT-BG-02),MOLDED NO:TNT-UABF-01.
 TEST: INSULATION RESISTANCE 10M OHM MIN AT DC500V.



TOLERANCE			TNT Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/1	DWG NO.	
DRAWN BY			DATE	08/05/05		
CHECK BY			TITLE USB A/F TO USB A/F			
APPD BY			PART NO. U09-AF-AF			