


#4-40 UNC

TNT P/N:SCR-A-10-01

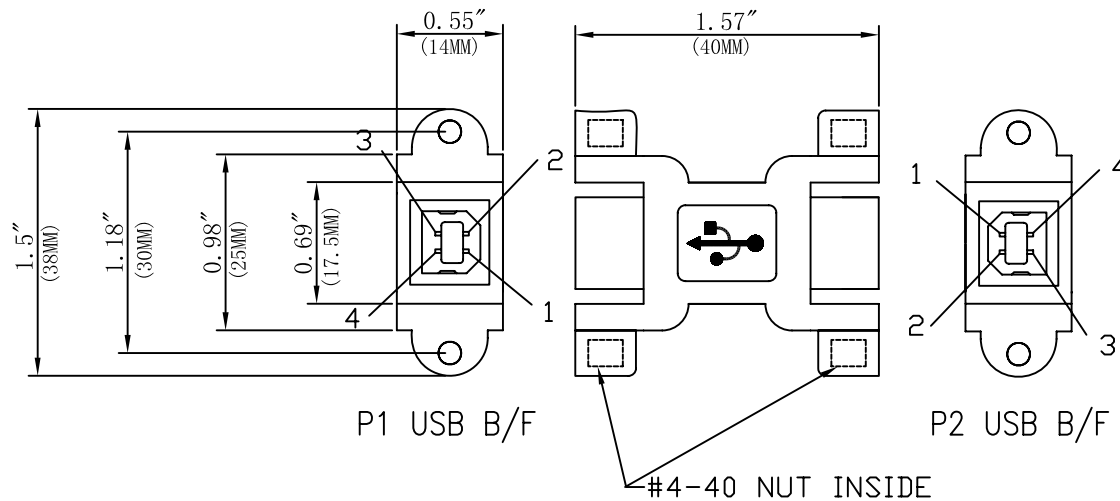

PIN OUT	
B Female	B Female
1	1
2	2
3	3
4	4
G	G

NOTE:
 WIRE: UL1061 26AWG 18mm.
 CONN.: P1&P2: USB B TYPE FEMALE,CONTACT
 MATERIAL:BRASS,GOLD PLATED OVER,SHELL NICKEL PLATED.
 ALL HOOD:MOLD PVC 25P BEIGE(TNT-BG-02),
 MOLDED NO:TNT-UABF-01.
 TEST: INSULATION RESISTANCE 10M OHM MIN AT DC500V.



TOLERANCE		INCHES		M/M		Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30		SCALE	NONE	REV	A	DWG NO.	
.XX	.010	.10		UNIT	MM			SHEET 1/1	
.XXX	.005	.05		DATE	08/05/05	TITLE USB B/F TO USB B/F			
DRAWN BY				PART NO.		U09-BF-BF			
CHECK BY				APPD BY					