


NOTE:

1. CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75?, UL1354) + (24AWG X 4C) + (24AWG X 2PAIRS)], AL-FOIL AND BRAID(85% min) SHIELDED WITH DRAIN WIRE, UL2919, BLACK(CTG-001) PVC JACKET, SLOT.
2. CONNECTOR: P1: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, 9PIN UNLOADED. P2: HIGH DENSITY D-SUB 15PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. THUMB SCREW TO BE MOLDED.
4. LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE COVERED WITH A CLEAR HEAT SHRINK TUBE.
5. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
6. ALL HOOD: MOLDED BLACK(CTG-001)PVC.
7. TESTING: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.
 SWAY TEST: FASTEN PLUG, MARKING 90° EACH FOR UP AND DOWN ONE TIME.
 HI-POT TEST (AFTER SWAY TEST): DC300V, 100M OHM.
8. PACKING: EACH CABLE IN A TNT PRINTING ZIP-LOCK POLY-BAG. BAR CODE LABEL(WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON TNT PRINTING ZIP-LOCK POLY-BAG.



SHELL ——— SHELL(DRAIN + BRAID)

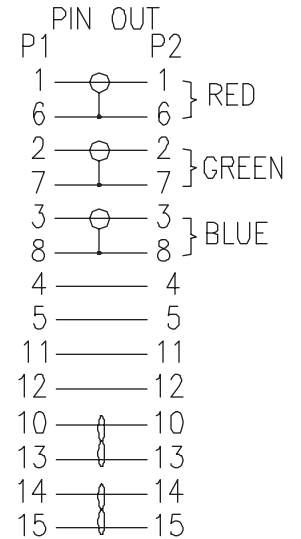

Super VGA Cable
 HD15 Male to HD15 Female, xxft

C18-HD15M-HD15F-**

P/N	**	XX	L	T
C18-HD15M-HD15F-03	03	3	914	+25/-25
C18-HD15M-HD15F-06	06	6	1829	+51/-51
C18-HD15M-HD15F-10	10	10	3048	+51/-51
C18-HD15M-HD15F-15	15	15	4572	+152/-51
C18-HD15M-HD15F-25	25	25	7620	+152/-51
C18-HD15M-HD15F-50	50	50	15240	+305/-152
C18-HD15M-HD15F-75	75	75	22860	+305/-152
C18-HD15M-HD15F-100	100	100	30480	+305/-152



- O
- S

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
<small>PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.</small>			
	mm	TITLE VGA VIDEO CABLE ASS'Y	
SCALE		CUS. NAME	
SHEET	1/1		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED			
.X±	.XX±	C18-HD15M-HD15F-**	
XXX±	ANGLE±	DRAW NO.	
REV. C	CUS.REV A	P9907076-E	
		CHECKED _____	DATE _____
		APPROVED _____	DATE _____