


\*\*\* SEE CHART 1

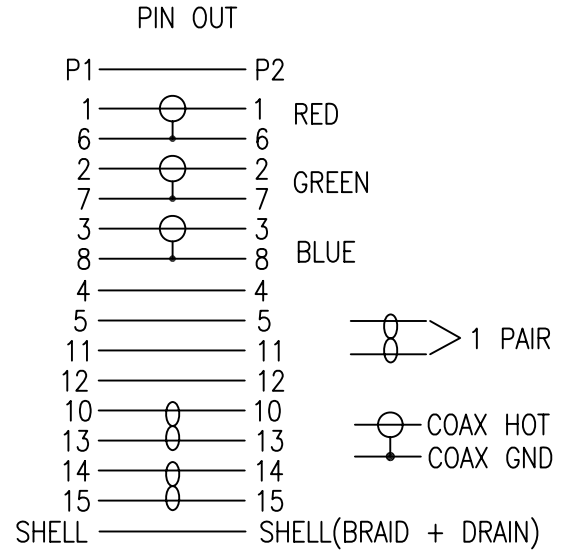

- NOTE:
- CABLE: {(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, COLOR CODE: RED, GREEN, BLUE ) + (24AWG X 2PAIRS + 24AWG X 4C)}, OVERALL: AL-FOIL AND BRAID(85%MIN) SHIELDED WITH A DRAIN WIRE, UL2919, BLACK(TNT-BK) PVC JACKET.SLOT Ø8.5±0.15MM.
  - CONNECTOR: P1 & P2: HIGH DENSITY D-SUB 15PIN MALE: THE 9TH UNLOADED, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
  - BLACK METAL SCREW.(MATERIAL: STEEL)
  - THUMB SCREW TO BE MOLDED BLACK (TNT-BK) ABS.
  - SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
  - ALL HOOD MOLDED BLACK(TNT-BK) PVC.
  - TESTING: 100% ELECTRICAL TEST: 1M OHM/MAX INSULATION RESISTANCE. 3 OHM/MIN CONTACTOR AT DC 300V
  - PACKING: EACH CABLE IN A PRINTED "TNT" POLY-BAG. LABEL(WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON THE PRINTED "TNT" POLY-BAG

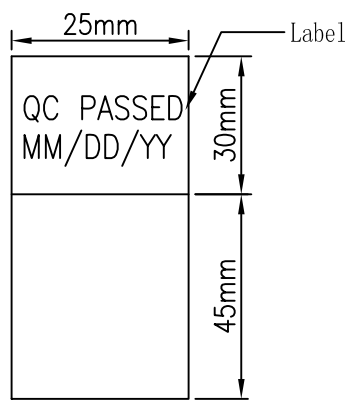


CHART 1

P/N	**	L(mm)	T(mm)
C18-HD15MM-06-L	06	1829	+152/-51
C18-HD15MM-10-L	10	3048	+152/-51
C18-HD15MM-12-L	12	3658	+152/-51
C18-HD15MM-15-L	15	4572	+152/-51
C18-HD15MM-25-L	25	7620	+152/-51



TOLERANCE		INCHES		M/M		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015	.10	.30	SCALE	NONE	REV	D		
.XX	.010	.10	.10	UNIT	MM				
.XXX	.005	.05	.05	SHEET	1/2	DWG NO.			
DRAWN BY				DATE		09/12/06			
CHECK BY				TITLE		HDB15M(90度) TO HDB15M(180度)			
APPD BY				PART NO.		C18-HD15MM-XX-L			